

56-2 Electromagnetic Compatibility

Refer to: R10 04-S1, 04-S2

56-2.1 Effective date and Scope:

56-2.1.1 Effective date from 2016/01/01, the new vehicle variants of category L shall comply with "56-2 Electromagnetic Compatibility".

56-2.1.2 Effective date from 2017/01/01, the new vehicle variants of categories M1 and N1 shall comply with "56-2 Electromagnetic Compatibility".

56-2.1.3 Effective date From 2018/01/01, the new vehicle variants of categories M2, M3, N2 and N3 shall comply with "56-2 Electromagnetic Compatibility".

56-2.1.4 Effective date From 2019/01/01, the new vehicle variants of category O shall comply with "56-2 Electromagnetic Compatibility".

56-2.1.5 The same applicant applying for low volume safety approval and the amounts of vehicle not exceed 3 at same year and the category symbols M1, L3 or L5 of same variant and specification, could exempt the Electromagnetic immunity requirement of this regulation.

56-2.1.6 The same applicant applying for vehicle-by-vehicle low volume safety approval and the amounts of vehicle not exceed 20 at same year and vehicle of same variant and specification, could exempt the Electromagnetic immunity requirement of this regulation.

56-2.1.7 For the vehicles used by authorities, organizations, schools or individuals for self-use only could exempt from this regulation of 56-2 Electromagnetic Compatibility.

56-2.2 Definitions

56-2.2.1 "Electromagnetic compatibility" means the ability of a vehicle or component(s) or separate electrical/electronic technical unit(s) to function satisfactorily in an electromagnetic environment without introducing intolerable electromagnetic disturbances to anything in that environment.

56-2.2.2 "Electromagnetic disturbance" means annoy electromagnetic phenomenon which may degrade the performance of a vehicle or component(s) or separate electrical/electronic technical unit(s). An electromagnetic disturbance may be electromagnetic noise or a change in the propagation medium itself.

56-2.2.3 "Electromagnetic immunity" means the ability of a vehicle or component(s) or separate technical unit(s) to perform without degradation of performance in the presence of specified electromagnetic disturbances.

56-2.2.4 "Electromagnetic environment" means the totality of electromagnetic phenomena existing at a given location.

56-2.2.5 "Reference limit" means the nominal level to which type approval and conformity of production limit values are referenced.

56-2.2.6 "Reference antenna" for the frequency range 20 to 80 MHz: means a shortened balanced resonant dipole at 80 MHz, and for the frequency range above 80 MHz: means a balanced half-wave resonant dipole tuned to the measurement frequency.

56-2.2.7 "Broadband electromagnetic disturbances" means electromagnetic disturbances which have a bandwidth greater than the

passband of the receiver used.

56-2.2.8 "Narrowband electromagnetic disturbances" means electromagnetic disturbances which have a bandwidth less than the passband of the receiver used.

56-2.2.9 "Electrical/electronic system" means an electrical and or electronic device or set of devices together with any associated electrical wiring which forms part of a vehicle but which is not intended to be type approved separately from the vehicle. Both RESS and Coupling system for charging the RESS are considered electrical / electronic systems.

56-2.2.10 "Electrical/electronic sub-assembly" (ESA) means an electrical and/or electronic device set of devices intended to be part of a vehicle, together with any associated electrical wiring, which performs one or more specialized functions. An ESA may be approved at the request of a manufacturer as either a "component" or a "separate technical unit(STU)".

56-2.2.11 "Immunity related functions" are:

(a) Functions related to the direct control of the vehicle:

(i) by degradation or change in: e.g. engine, gear, brake, suspension, active steering, speed limitation devices;

(ii) by affecting drivers position: e.g. seat or steering wheel positioning;

(iii) by affecting driver's visibility: e.g. dipped beam, windscreen wiper.

(b) Functions related to driver, passenger and other road user protection:

(i) e.g. airbag and safety restraint systems.

(c) Functions which when disturbed cause confusion to the driver or other road users:

(i) optical disturbances: incorrect operation of e.g. direction indicators, stop lamps, end outline marker lamps, rear position lamp, light bars for emergency system, wrong information from warning indicators, lamps or displays related to functions in subparagraphs (a) or (b) which might be observed in the direct view of the driver;

(ii) acoustical disturbances: incorrect operation of e.g. anti-theft alarm, horn.

(d) Functions related to vehicle data bus functionality:

(i) by blocking data transmission on vehicle data bus-systems, which are used to transmit data, required to ensure the correct functioning of other immunity related functions.

(e) Functions which when disturbed affect vehicle statutory data: e.g. tachograph, odometer.

(f) Function related to the RESS in charging mode coupled to the power grid:

(i) by leading to unexpected vehicle motion.

56-2.2.12 "RESS" means the rechargeable energy storage system that provides electric energy for electric propulsion of the vehicle.

56-2.2.13 "Coupling system for charging the RESS" means the electrical circuit installed in the vehicle used for charging the RESS."

56-2.3 Electromagnetic Compatibility shall according to suitable types and range of principle are as below :

56-2.3.1 If use completed vehicle for testing, which shall according to suitable variants and range of principle are as below :

56-2.3.1.1 The same vehicle category symbol.

56-2.3.1.2 The same type of large passenger vehicle body.

56-2.3.1.3 The same brand and vehicle type series.

56-2.3.1.4 The same chassis brand.

56-2.3.1.5 Chassis manufacturers announced that the same chassis vehicle type series.

56-2.3.1.6 The same type of vehicle propulsion source (internal combustion engine or pure electric motor or hybrid vehicle).

56-2.3.2 If use chassis vehicle instead of completed vehicle for testing, which shall according to suitable variants and range of principle are as below :

56-2.3.2.1 The same vehicle category.

56-2.3.2.2 The same chassis brand.

56-2.3.2.3 Chassis manufacturers announced that the same chassis vehicle type series.

56-2.3.2.4 The same type of vehicle propulsion source (internal combustion engine or pure electric motor or hybrid vehicle).

56-2.3.3 If use Electrical/Electronic sub-assembly(ESA) for testing, which shall according to suitable variants and range of principle are as below :

56-2.3.3.1 The same ESA brand.

56-2.3.3.2 The same ESA type.

56-2.3.3.3 The same function performed by the ESA.

56-2.3.3.4 The same general arrangement of the electrical and/or electronic components,(If applicable).

56-2.4 Specifications in configurations other than "RESS charging mode coupled to the power grid.

56-2.4.1 General specifications

56-2.4.1.1 A vehicle and its electrical/electronic system(s) or ESA(s) shall be so designed, constructed and fitted as to enable the vehicle, in normal conditions of use, to comply with the requirements of this Regulation.

56-2.4.1.1.1 A vehicle shall be tested for radiated emissions and for immunity to radiated disturbances. No tests for conducted emissions or immunity to conducted disturbances are required for vehicle type approval.

56-2.4.1.1.2 ESA(s) shall be tested for radiated and conducted emissions, for immunity to radiated and conducted disturbances.

56-2.4.1.2 Before testing the Technical Service has to prepare a test plan in conjunction with the manufacturer, which contains at least mode of operation, stimulated function(s), monitored function(s), pass/fail criterion(criteria) and intended emissions.

56-2.4.2 Specifications concerning broadband electromagnetic radiation from vehicles.

56-2.4.2.1 Method of measurement

The electromagnetic radiation generated by the vehicle representative of its type shall be measured using the method described in paragraph

56-2.6. The method of measurement shall be defined by the vehicle manufacturer in accordance with the Technical

Service.

56-2.4.2.2 Vehicle broadband type approval limits

56-2.4.2.2.1 If measurements are made using the method described in paragraph 56-2.7 using a vehicle-to antenna spacing of 10.0 +/- 0.2 m, the limits shall be 32 dB microvolts/m in the 30 to 75 MHz frequency band and 32 to 43 dB microvolts/m in the 75 to 400 MHz frequency band, this limit increasing logarithmically with frequencies above 75 MHz as shown in figure 1. In the 400 to 1,000 MHz frequency band the limit remains constant at 43 dB microvolts/m.

56-2.4.2.2.2 If measurements are made using the method described in paragraph 56-2.5 using a vehicle-toantenna spacing of 3.0 +/- 0.05 m, the limits shall be 42 dB microvolts/m in the 30 to 75 MHz frequency band and 42 to 53 dB microvolts/m in the 75 to 400 MHz frequency band, this limit increasing logarithmically with frequencies above 75 MHz as shown in figure 2. In the 400 to 1,000 MHz frequency band the limit remains constant at 53 dB microvolts/m.

56-2.4.2.2.3 On the vehicle representative of its type, the measured values, expressed in dB microvolts/m shall be below the type approval limits.

56-2.4.3 Specifications concerning narrowband electromagnetic radiation from vehicles

56-2.4.3.1 Method of measurement

The electromagnetic radiation generated by the vehicle representative of its type shall be measured using the method described in paragraph 56-2.7. These shall be defined by the vehicle manufacturer in accordance with the Technical Service.

56-2.4.3.2 Vehicle narrowband type approval limits

56-2.4.3.2.1 If measurements are made using the method described in paragraph 56-2.7 using a vehicle-to antenna spacing of 10.0 +/- 0.2 m, the limits shall be 22 dB microvolts/m in the 30 to 75 MHz frequency band and 22 to 33 dB microvolts/m in the 75 to 400 MHz frequency band, this limit increasing logarithmically with frequencies above 75 MHz as shown in figure 3. In the 400 to 1,000 MHz frequency band the limit remains constant at 33 dB microvolts/m.

56-2.4.3.2.2 If measurements are made using the method described in paragraph 56-2.8 using a vehicle-toantenna spacing of 3.0 +/- 0.05 m, the limit shall be 32 dB microvolts/m in the 30 to 75 MHz frequency band and 32 to 43 dB microvolts/m in the 75 to 400 MHz frequency band, this limit increasing logarithmically with frequencies above 75 MHz as shown in figure 4. In the 400 to 1,000 MHz frequency band the limit remains constant at 43 dB microvolts/m.

56-2.4.3.2.3 On the vehicle representative of its type, the measured values, expressed in dB microvolts/m, shall be below the type approval limit.

56-2.4.3.2.4 Notwithstanding the limits defined in paragraphs 56-2.4.3.2.1., 56-2.4.3.2.2. and 56-2.4.3.2.3., if, during the initial step described in paragraph 56-2.7, the signal strength measured at the vehicle broadcast radio antenna is less than 20 dB microvolts over the frequency range 76 to 108 MHz measured with an average detector, then the vehicle shall be deemed

to comply with the limits for narrowband emissions and no further testing will be required.

56-2.4.4 Specifications concerning immunity of vehicles to electromagnetic radiation

56-2.4.4.1 Method of testing

The immunity to electromagnetic radiation of the vehicle representative of its type shall be tested by the method described in paragraph 56-2.11.

56-2.4.4.2 Vehicle immunity type approval limits

56-2.4.4.2.1 If tests are made using the method described paragraph 56-2.11, the field strength shall be 30 volts/m rms (root mean squared) in over 90 per cent of the 20 to 2,000 MHz frequency band and a minimum of 25 volts/m rms over the whole 20 to 2,000 MHz frequency band.

56-2.4.4.2.2 The vehicle representative of its type shall be considered as complying with immunity requirements if, during the tests performed in accordance with paragraph 56-2.11, there shall be no degradation of performance of "immunity related functions"., according to paragraph 56-2.11.2.1.

56-2.4.5 Specification concerning broadband electromagnetic interference generated by ESAs.

56-2.4.5.1 Method of measurement

The electromagnetic radiation generated by the ESA representative of its type shall be measured by the method described in paragraph 56-2.8.

56-2.4.5.2 ESA broadband type approval limits

56-2.4.5.2.1 If measurements are made using the method described in paragraph 56-2.8, the limits shall be 62 to 52 dB microvolts/m in the 30 to 75 MHz frequency band, this limit decreasing logarithmically with frequencies above 30 MHz, and 52 to 63 dB microvolts/m in the 75 to 400 MHz band, this limit increasing logarithmically with frequencies above 75 MHz as shown in figure 5. In the 400 to 1,000 MHz frequency band the limit remains constant at 63 dB microvolts/m.

56-2.4.5.2.2 On the ESA representative of its type, the measured values, expressed in dB microvolts/ m, shall be below the type approval limits.

56-2.4.6 Specifications concerning narrowband electromagnetic interference generated by ESAs.

56-2.4.6.1 Method of measurement

The electromagnetic radiation generated by the ESA representative of its type shall be measured by the method described paragraph 56-2.9.

56-2.4.6.2 ESA narrowband type approval limits

56-2.4.6.2.1 If measurements are made using the method described paragraph 56-2.9, the limits shall be 52 to 42 dB microvolts/m in the 30 to 75 MHz frequency band, this limit decreasing logarithmically with frequencies above 30 MHz, and 42 to 53 dB microvolts/m in the 75 to 400 MHz band, this limit increasing logarithmically with frequencies above 75 MHz as

shown figure 6. In the 400 to 1,000 MHz frequency band the limit remains constant at 53 dB microvolts/m.

56-2.4.6.2.2 On the ESA representative of its type, the measured value, expressed in dB microvolts/ m shall be below the type approval limits.

56-2.4.7 Specifications concerning immunity of ESAs to electromagnetic radiation

56-2.4.7.1 Method(s) of testing

The immunity to electromagnetic radiation of the ESA representative of its type shall be tested by the method(s) chosen from those described in paragraph 56-2.11.

56-2.4.7.2 ESA immunity type approval limits

56-2.4.7.2.1 If tests are made using the methods described in paragraph 56-2.11, the immunity test levels shall be 60 volts/m root-mean-square (rms) for the 150 mm stripline testing method, 15 volts/m rms for the 800 mm stripline testing method, 75 volts/m rms for the Transverse Electromagnetic Mode (TEM) cell testing method, 60 mA rms for the bulk current injection (BCI) testing method and 30 volts/m rms for the free field testing method in over 90 per cent of the 20 to 2,000 MHz frequency band, and to a minimum of 50 volts/m rms for the 150 mm stripline testing method, 12.5 volts/m rms for the 800 mm stripline testing method, 62.5 volts/m rms, for the TEM cell testing method, 50 m rms A for the bulk current injection (BCI) testing method and 25 volts/m rms for the free field testing method over the whole 20 to 2,000 MHz frequency band.

56-2.4.7.2.2 The ESA representative of its type shall be considered as complying with immunity requirements if, during the tests performed in accordance with paragraph 56-2.11, there shall be no degradation of performance of "immunity related functions".

56-2.4.8 Specifications concerning the immunity of ESAs to transient disturbances conducted along supply lines.

56-2.4.8.1 Method of testing

The immunity of ESA representative of its type shall be tested by the method(s) according to ISO 7637-2(second edition 2004), as described in paragraph 56-2.12 with the test levels given table 1.

Table 1: Immunity of ESA

| Test pulse number | Immunity test level | Functional status for systems: | |
|-------------------|---------------------|---|---|
| | | Related to immunity related functions | Not related to immunity related functions |
| 1 | III | C | D |
| 2a | III | B | D |
| 2b | III | C | D |
| 3a/3b | III | A | D |
| 4 | III | B (for ESA which must be operational during engine start phases) | D |

The official directions are written

atibility

56-2.4.9 Specifications concerning the emission of transient conducted disturbances generated by ESAs on supply lines.

56-2.4.9.1 Method of testing

The emission of ESA representative of its type shall be tested by the method(s) according to ISO 7637-2,(second edition 2004) as described in paragraph 56-2.12 for the levels given in table 2.

Table 2: Maximum allowed pulse amplitude

| Polarity of pulse amplitude | Maximum allowed pulse amplitude for | |
|-----------------------------|-------------------------------------|----------------------------|
| | Vehicles with 12 V systems | Vehicles with 24 V systems |
| Positive | +75 | +150 |
| Negative | -100 | -450 |

56-2.4.10

56-2.4

frequency

greater than 9 kHz, it shall be deemed to comply with paragraph 56-2.4.3, 56-2.4.6, 56-2.7. or 56-2.9.

56-2.4.10.2 Vehicles which do not have electrical/electronic systems with "immunity related functions" need not be tested for immunity to radiated disturbances and shall be deemed to comply with paragraph 56-2.4.4. and 56-2.10 to this Regulation.

56-2.4.10.3 . ESAs with no immunity related functions need not be tested for immunity to radiated disturbances and shall be deemed to comply with paragraph 56-2 4.7 and paragraph 56-2 11 to this Regulation.

56-2.4.10.4 . Electrostatic discharge

For vehicles fitted with tyres, the vehicle body/chassis can be considered to be an electrically isolated structure. Significant electrostatic forces in relation to the vehicle's external environment only occur at the moment of occupant entry into or exit from the vehicle. As the vehicle is stationary at these moments, no type approval test for electrostatic discharge is deemed necessary.

56-2.4.10.5 Emission of transient conducted disturbances generated by ESAs on supply lines.ESAs that are not switched, contain no switches or do not include inductive loads need not be tested for transient conducted emission and shall be deemed to comply with paragraph 56-2.4.9.

56-2.4.10.6 The loss of function of receivers during the immunity test, when the test signal is within the receiver bandwidth (RF exclusion

band) as specified for the specific radio service/ product in the harmonized international EMC standard, does not necessarily lead to a fail criteria.


56-2.4.10.7 RF transmitters shall be tested in the transmit mode. Wanted emissions (e.g. from RF transmitting systems) within the necessary bandwidth and out of band emissions are disregarded for the purpose of this Regulation. Spurious emissions are subject to this Regulation.

56-2.4.10.7.1 "Necessary Bandwidth": for a given class of emission, the width of the frequency band which is just sufficient to ensure the transmission of information at the rate and with the quality required under specified conditions (Article 1, No. 1.152 of the International Telecommunication Union (ITU) Radio Regulations).

56-2.4.10.7.2 "Out-of-band Emissions": Emission on a frequency or frequencies immediately outside the necessary bandwidth which results from the modulation process, but excluding spurious emissions (Article 1, No. 1.144 of the ITU Radio Regulations).

56-2.4.10.7.3 "Spurious Emission": In every modulation process additional undesired signals exist. They are summarized under the expression "spurious emissions". Spurious emissions are emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions (Article 1 No. 1.145 of the ITU Radio Regulations).

| Limit E (dB μ V/m) at frequency F (MHz) | | |
|---|------------------------------|-----------------|
| 30 - 75 MHz | 75 - 400 MHz | 400 - 1,000 MHz |
| E = 32 | $E = 32 + 15.13 \log (F/75)$ | E = 43 |

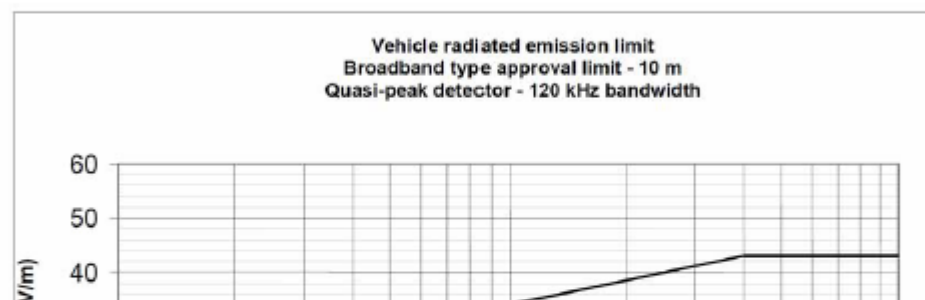


The official directions are written in Chinese

ipatibility


(See paragraph 4.2.2.1 of this Regulation)

Figure 1: Vehicle broadband reference limits (Antenna-vehicle separation :10 m)

| Limit E (dB muV/m) at frequency F (MHz) | | |
|---|------------------------------|-----------------|
| 30 - 75 MHz | 75 - 400 MHz | 400 - 1,000 MHz |
| E = 42 | $E = 42 + 15.13 \log (F/75)$ | E = 53 |

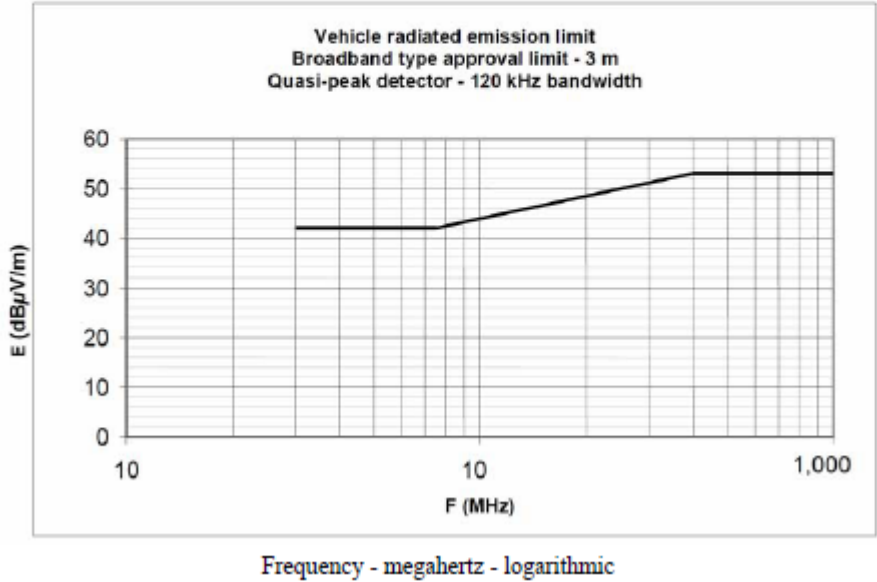

| Limit E (dB µV/m) at frequency F (MHz) | | |
|--|------------------------------|-----------------|
| 30 - 75 MHz | 75 - 400 MHz | 400 - 1,000 MHz |
| E = 22 | $E = 22 + 15.13 \log (F/75)$ | E = 33 |

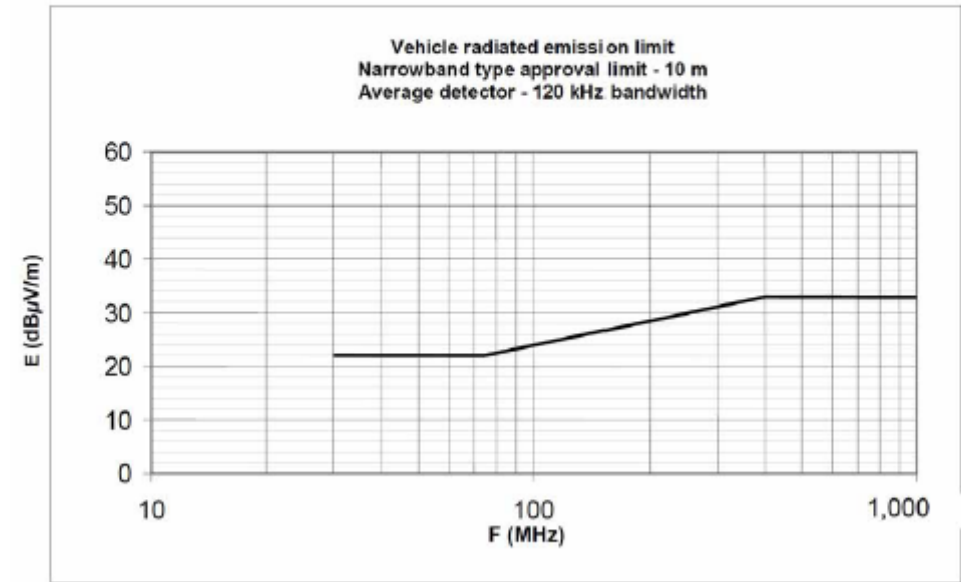


m)

Frequency - megahertz - logarithmic

| Limit E (dB µV/m) at frequency F (MHz) | | |
|--|------------------------------|-----------------|
| 30 - 75 MHz | 75 - 400 MHz | 400 - 1,000 MHz |
| E = 32 | $E = 32 + 15.13 \log (F/75)$ | E = 43 |


The official directions are written in Chinese

patibility

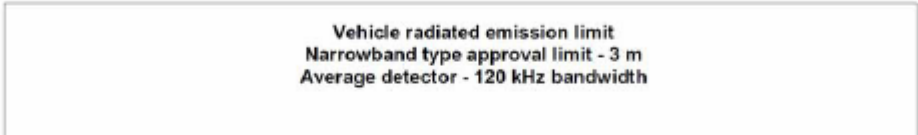

(See paragraph 4.3.2.2 of this Regulation)
Figure 4: Vehicle narrowband reference limits (Antenna-vehicle separation :3 m)

| Limit E (dB µV/m) at frequency F (MHz) | | |
|--|------------------------------|-----------------|
| 30 - 75 MHz | 75 - 400 MHz | 400 - 1,000 MHz |
| $E = 62 - 25.13 \log (F/30)$ | $E = 52 + 15.13 \log (F/75)$ | $E = 63$ |

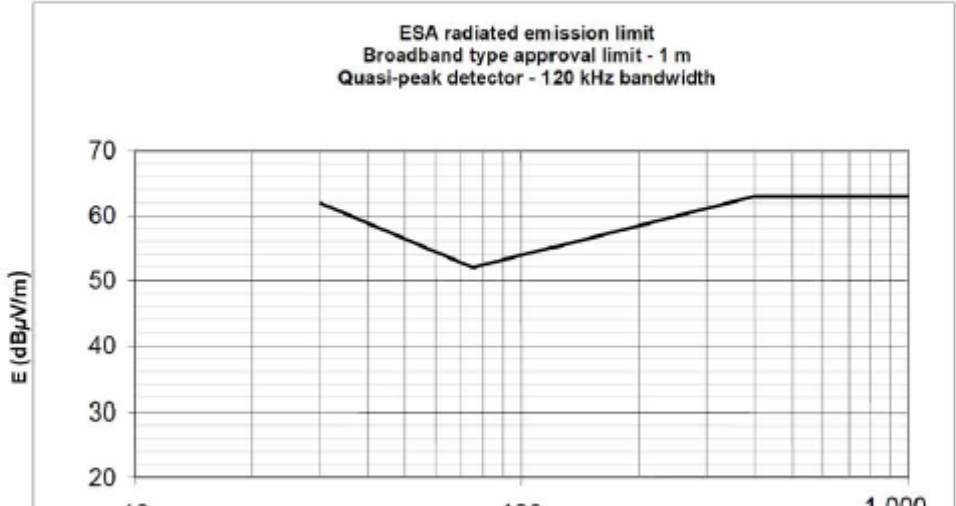


The official directions are written in Chinese

patibility

(See paragraph 4.5.2.1 of this Regulation)
Figure 5: Electrical/electronic sub-assembly

| Limit E (dB µV/m) at frequency F (MHz) | | |
|--|------------------------------|-----------------|
| 30 - 75 MHz | 75 - 400 MHz | 400 - 1,000 MHz |
| $E = 52 - 25.13 \log (F/30)$ | $E = 42 + 15.13 \log (F/75)$ | $E = 53$ |

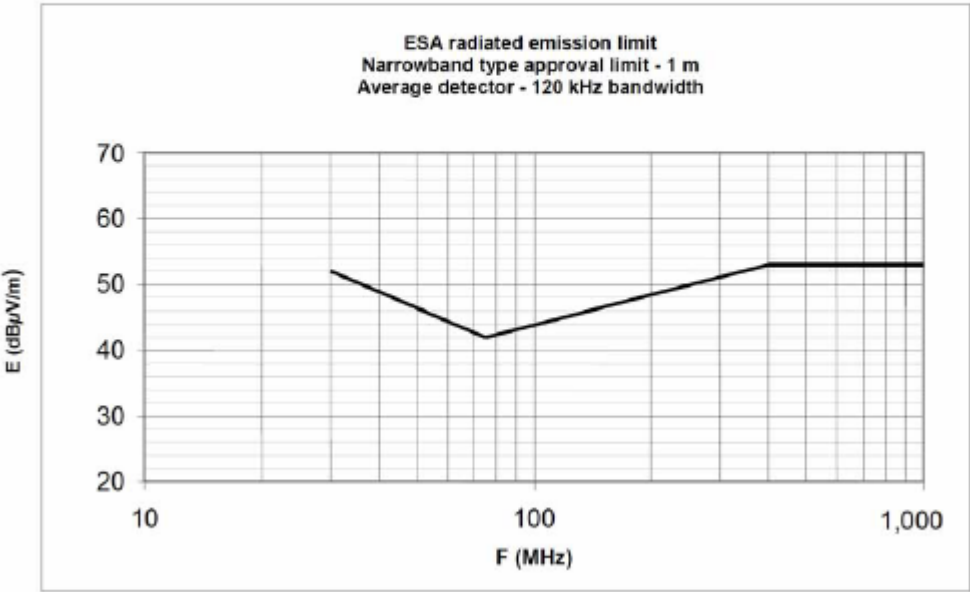

Frequency - megahertz - logarithmic

- 56-2.5 Additional Specificat
- 56-2.5.1 General specifi
- 56-2.5.1.1 A vehicle and its electrical/electronic system(s) shall be so designed, constructed and fitted as to enable the vehicle, in

configuration "RESS charging mode coupled to the power grid", to comply with the requirements of this Regulation.

56-2.5.1.2 A vehicle in configuration "RESS charging mode coupled to the power grid" shall be tested for radiated emissions, immunity to radiated disturbances, conducted emissions and immunity to conducted disturbances.

56-2.5.1.3 Before testing the Technical Service has to prepare a test plan in conjunction with the manufacturer, for the configuration "RESS charging mode coupled to the power grid" configuration which contains at least mode of operation, stimulated function(s), monitored function(s), pass/fail criterion (criteria) and intended emissions.

56-2.5.2 Specifications concerning broadband electromagnetic radiation from vehicles

56-2.5.2.1 Method of measurement

The electromagnetic radiation generated by the vehicle representative of its type shall be measured using the method described in paragraph 56-2.6. The method of measurement shall be defined by the vehicle manufacturer in accordance with the Technical Service.

56-2.5.2.2 Vehicle broadband type approval limits

56-2.5.2.2.1 If measurements are made using the method described in paragraph 56-2.6 using a vehicle-to-antenna spacing of 10.0 +/- 0.2 m, the limits shall be 32 dB microvolts/m in the 30 to 75 MHz frequency band and 32 to 43 dB microvolts/m in the 75 to 400 MHz frequency band, this limit increasing logarithmically with frequencies above 75 MHz as shown in Figure 1. In the 400 to 1,000 MHz frequency band the limit remains constant at 43 dB microvolts/m.

56-2.5.2.2.2 If measurements are made using the method described in paragraph 56-2.6 using a vehicle-to-antenna spacing of 3.0 +/- 0.05 m, the limits shall be 42 dB microvolts/m in the 30 to 75 MHz frequency band and 42 to 53 dB microvolts/m in the 75 to 400 MHz frequency band, this limit increasing logarithmically with frequencies above 75 MHz as shown in Figure 2. In the 400 to 1,000 MHz frequency band the limit remains constant at 53 dB microvolts/m.

On the vehicle representative of its type, the measured values, expressed in dB microvolts/m shall be below the type approval limits.

56-2.5.3 Specifications concerning emission of harmonics on AC power lines from vehicles

56-2.5.3.1 Method of measurement

The harmonics emission on AC power lines generated by the vehicle representative of its type shall be measured using the method described in paragraph 56-2.13. The method of measurement shall be defined by the vehicle manufacturer in accordance with the Technical Service.

56-2.5.3.2 Vehicle type approval limit

56-2.5.3.2.1 If measurements are made using the method described in paragraph 56-2.13, the limits for input current ≤ 16 A per phase are those defined in IEC 61000-3-2 (edition 3.2 - 2005 + Amd1:2008 + Amd2:2009) and given in table 3.

Table 3: Maximum allowed harmonics (input current ≤ 16 A per phase)

| Harmonic number n | Maximum authorized harmonic current A |
|-----------------------|--|
| <i>Odd harmonics</i> | |
| 3 | 2.3 |
| 5 | 1.14 |
| 7 | 0.77 |
| 9 | 0.40 |
| 11 | 0.33 |
| 13 | 0.21 |
| $15 \leq n \leq 39$ | $0.15 \times 15/n$ |
| <i>Even harmonics</i> | |
| 2 | 1.08 |
| 4 | 0.43 |
| 6 | 0.30 |
| $8 \leq n \leq 40$ | $0.23 \times 8/n$ |

56-2.5.3.2.2 If measurements are made using the method described in paragraph 13, the limits for input current > 16 A and ≤ 75 A per phase are those defined in IEC 61000-3-12 (edition 1.0 -2004) and given in table 4, 5 and 6.

Table 4: Maximum allowed harmonics (input current > 16 A and ≤ 75 A per phase) for equipment other than balanced three-phase equipment

| Minimum R_{sce} | Acceptable individual harmonic current I_n/I_1 % | | | | | | Maximum current harmonic ratio % | |
|---|--|-------|-------|-------|----------|----------|----------------------------------|------|
| | I_3 | I_5 | I_7 | I_9 | I_{11} | I_{13} | THD | PWHD |
| 33 | 21.6 | 10.7 | 7.2 | 3.8 | 3.1 | 2 | 23 | 23 |
| 66 | 24 | 13 | 8 | 5 | 4 | 3 | 26 | 26 |
| 120 | 27 | 15 | 10 | 6 | 5 | 4 | 30 | 30 |
| 250 | 35 | 20 | 13 | 9 | 8 | 6 | 40 | 40 |
| ≥ 350 | 41 | 24 | 15 | 12 | 10 | 8 | 47 | 47 |
| Relative values of even harmonics lower or equal to 12 shall be lower than $16/n$ %. Even harmonics greater than 12 are taken into account in the THD and PWHD the same way than odd harmonics. | | | | | | | | |
| Linear interpolation between successive values of R_{sce} is authorized. | | | | | | | | |

Table 5: Maximum allowed harmonics (input current > 16 A and ≤ 75 A per phase) for balanced three phase equipment

| Minimum R_{sce} | Acceptable individual harmonic current I_n/I_1 % | | | | Maximum current harmonic ratio % | |
|---|--|-------|----------|----------|----------------------------------|------|
| | I_5 | I_7 | I_{11} | I_{13} | THD | PWHD |
| 33 | 10.7 | 7.2 | 3.1 | 2 | 13 | 22 |
| 66 | 14 | 9 | 5 | 3 | 16 | 25 |
| 120 | 19 | 12 | 7 | 4 | 22 | 28 |
| 250 | 31 | 20 | 12 | 7 | 37 | 38 |
| ≥ 350 | 40 | 25 | 15 | 10 | 48 | 46 |
| Relative values of even harmonics lower or equal to 12 shall be lower than $16/n$ %. Even harmonics greater than 12 are taken into account in the THD and PWHD the same way than odd harmonics. | | | | | | |
| Linear interpolation between successive values of R_{sce} is authorized. | | | | | | |

Table 6: Maximum allowed harmonics (input current > 16 A and ≤ 75 A per phase) for balanced threephase equipment under specific conditions

| Minimum R_{sce} | Acceptable individual harmonic current I_n/I_1 % | | | | Maximum current harmonic ratio % | |
|--|--|-------|----------|----------|----------------------------------|------|
| | I_5 | I_7 | I_{11} | I_{13} | THD | PWHD |
| 33 | 10.7 | 7.2 | 3.1 | 2 | 13 | 22 |
| ≥ 120 | 40 | 25 | 15 | 10 | 48 | 46 |
| Relative values of even harmonics lower or equal to 12 shall be lower than $16/n$ %. Even harmonics greater than 12 are taken into account in the THD and PWHD the same way than odd harmonics | | | | | | |

56-2.5.4 Specifications concerning emission of voltage changes, voltage fluctuations and flicker on AC power lines from vehicles

56-2.5.4.1 Method of measurement

The emission of voltage changes, voltage fluctuations and flicker on AC power lines generated by the vehicle representative of its type shall be measured using the method described in paragraph 56-2.14. The method of measurement shall be defined by the vehicle manufacturer in accordance with the Technical Service.

56-2.5.4.2 Vehicle type approval limit

56-2.5.4.2.1 If measurements are made using the method described in paragraph 56-2.14, the limits for rated current ≤ 16 A per phase and not subjected to conditional connection are those defined in IEC 61000-3-3 (edition 2.0 - 2008) and given in table 7.

Table 7: Maximum allowed voltage changes, voltage fluctuations and flicker (rated current ≤ 16 A per phase and not subjected to conditional connection)

| Limits |
|------------------------------------|
| Values given in 61000-3-3 clause 5 |

56-2.5.4.2.2 If measurements are made using the method described in paragraph 14, the limits for rated current > 16 A and ≤ 75 A per phase and subjected to conditional connection are those defined in IEC 61000-3-11 (edition 1.0 - 2000) and given in table 8.

Table 8: Maximum allowed voltage changes, voltage fluctuations and flicker (rated current > 16 A and ≤ 75 A per phase and subjected to conditional connection)

| Limits |
|---|
| Values given in IEC 61000-3-11 (edition 1.0 - 2000), clause 5 |

56-2.5.5 Specifications concerning emission of radiofrequency conducted disturbances on AC or DC power lines from vehicles

56-2.5.5.1 Method of measurement

The emission of radiofrequency conducted disturbances on AC or DC power lines generated by the vehicle representative of its type shall be measured using the method described in paragraph 56-2.15. The method of measurement shall be defined by the vehicle manufacturer in accordance with the Technical Service.

56-2.5.5.2 Vehicle type approval limit

56-2.5.5.2.1 If measurements are made using the method described in paragraph 56-2.15, the limits on AC power lines are those defined in IEC 61000-6-3 (edition 2.0 - 2006) and given in table 9.

Table 9: Maximum allowed radiofrequency conducted disturbances on AC power lines

| Frequency (MHz) | Limits and detector |
|-----------------|---|
| 0.15 to 0.5 | 66 to 56 dB microvolts (quasi-peak) |
| | 56 to 46 dB microvolts (average) |
| | (linearly decreasing with logarithm of frequency) |
| 0.5 to 5 | 56 dB microvolts (quasi-peak) |
| | 46 dB microvolts (average) |
| 5 to 30 | 60 dB microvolts (quasi-peak) |
| | 50 dB microvolts (average) |

56-2.5.5.2.2 If measurements are made using the method described in paragraph 56-2.15, the limits on DC power lines are those defined in IEC 61000-6-3 (edition 2.0 - 2006) and given in table10.

Table 10: Maximum allowed radiofrequency conducted disturbances on DC power lines

| Frequency (MHz) | Limits and detector |
|-----------------|---|
| 0.15 to 0.5 | 79 dB µV (quasi-peak) 66 dB µV (average) |
| 0.5 to 30 | 73 dB µV (quasi-peak) 60 dB µV (average) |

56-2.5.6 Specifications concerning emission of radiofrequency conducted disturbances on network and telecommunication access from vehicles

56-2.5.6.1 Method of measurement

The emission of radiofrequency conducted disturbances on network and telecommunication access generated by the vehicle representative of its type shall be measured using the method described in paragraph 16. The method of measurement shall be defined by the vehicle manufacturer in accordance with the Technical Service.

56-2.5.6.2 Vehicle type approval limit

56-2.5.6.2.1 If measurements are made using the method described in paragraph 56-2.16, the limits on network and telecommunication access are those defined in IEC 61000-6-3 (edition 2.0- 2006) and given in table 11.

Table 11: Maximum allowed radiofrequency conducted disturbances on network and telecommunication access

| Frequency (MHz) | Limits and detector | |
|-----------------|--|---|
| 0.15 to 0.5 | 84 to 74 dB µV (quasi-peak) 74 to 64 dB µV (average) (linearly decreasing with logarithm of frequency) | 40 to 30 dB µA (quasi-peak) 30 to 20 dB µA (average) (linearly decreasing with logarithm of frequency) |
| 0.5 to 30 | 74 dB µV (quasi-peak) 64 dB µV (average) | 30 dB µA (quasi-peak) 20 dB µA (average) |

56-2.5.7 Specifications concerning immunity of vehicles to electromagnetic radiation

56-2.5.7.1 Method of testing

The immunity to electromagnetic radiation of the vehicle representative of its type shall be tested by the method described in paragraph 56-2.10.

56-2.5.7.2 Vehicle immunity type approval limits

56-2.5.7.2.1 If tests are made using the method described in paragraph 56-2.10, the field strength shall be 30 volts/m rms (root mean squared) in over 90 per cent of the 20 to 2,000 MHz frequency band and a minimum of 25 volts/m rms over the whole 20 to 2,000 MHz frequency band.

56-2.5.7.2.2 The vehicle representative of its type shall be considered as complying with immunity requirements if, during the tests performed in accordance with paragraph 56-2.10, there shall be no degradation of performance of "immunity related functions", according to paragraph 56-2.10.2.2. of paragraph 56-2.10.

56-2.5.8 Specifications concerning the immunity of vehicles to electrical fast transient/burst disturbances conducted along AC and DC power lines.

56-2.5.8.1 Method of testing

The immunity to electrical fast transient/burst disturbances conducted along AC and DC power lines of the vehicle representative of its type shall be tested by the method described in paragraph 56-2.17.

56-2.5.8.2 Vehicle immunity type approval limits

56-2.5.8.2.1 If tests are made using the methods described in paragraph 56-2.17, the immunity test levels, for AC or DC power lines, shall be : +/- 2 kV test voltage in open circuit, with a rise time(T_r) of 5 ns, and a hold time (T_h) of 50 ns and a repetition rate of 5 kHz for at least 1 minute.

56-2.5.8.2.2 The vehicle representative of its type shall be considered as complying with immunity requirements if, during the tests performed in accordance with paragraph 56-2.17, there shall be no degradation of performance of "immunity related functions", according to paragraph 56-2.10.2.2.

56-2.5.9 Specifications concerning the immunity of vehicles to surge conducted along AC or DC power lines.

56-2.5.9.1 Method of testing

The immunity to surge conducted along AC / DC power lines of the vehicle representative of its type shall be tested by the method described in paragraph 56-2.18.

56-2.5.9.2 Vehicle immunity type approval limits

56-2.5.9.2.1 If tests are made using the methods described in paragraph 18, the immunity test levels shall be:

(a) for AC power lines: +/- 2 kV test voltage in open circuit between line and earth and +/- 1 kV between lines, with a rise time (T_r) of 1,2 microseconds, and a hold time (T_h) of 50 microseconds. Each surge shall be applied 5 times at 1 minute delay for each of following phases: 0, 90, 180 and 270 degrees,

(b) for DC power lines: +/- 0,5 kV test voltage in open circuit between line and earth and +/- 0,5 kV between lines, with a rise time (T_r) of 1,2 microseconds, and a hold time (T_h) of 50 microseconds. Each surge shall be applied 5 times at 1 minute delay.

56-2.5.9.2.2 The vehicle representative of its type shall be considered as complying with immunity requirements if, during the tests performed in accordance with paragraph 18, there shall be no degradation of performance of "immunity related functions", according to paragraph 56-2.10.2.2..

56-2.5.10 Exceptions

56-2.5.10.1 When network and telecommunication access of the vehicle uses power line Transmission (PLT) on its AC/DC power lines, paragraph 56-2.5.6 shall not be applied.

56-2.6 Method of measurement of radiated broadband electromagnetic emission from vehicles

56-2.6.1 General

56-2.6.1.1 The test method described in this annex shall only be applied to vehicles. This method concerns both configurations of the vehicle:

- (a) other than "RESS in charging mode coupled to the power grid".
- (b) "RESS in charging mode coupled to the power grid".

56-2.6.1.2 Test method

This test is intended to measure the broadband emissions generated by electrical or electronic systems fitted to the vehicle (e.g. ignition system or electric motors).

If not otherwise stated in this annex the test shall be performed according to CISPR 12 (amendment 1, fifth edition 2005).

56-2.6.2 Vehicle state during tests

56-2.6.2.1 Vehicle in configuration other than "RESS in charging mode coupled to the power grid".

56-2.6.2.1.1 Engine

The engine shall be in operation according to CISPR 12 (amendment 1, fifth edition 2005) clause 56-2.6.3.2.

56-2.6.2.1.2 Other vehicle systems

All equipment capable of generating broadband emissions which can be switched on permanently by the driver or passenger should be in operation in maximum load, e.g. wiper motors or fans. The horn and electric window motors are excluded because they are not used continuously.

56-2.6.2.2 Vehicle in configuration "RESS in charging mode coupled to the power grid".

This vehicle shall be in battery charging mode at rated power until the AC or DC current reached at least 80 per cent of its initial value.

The test set-up for the connection of the vehicle in configuration "RESS in charging mode coupled to the power grid" is shown in figure 7.

56-2.6.3 Measurement location

56-2.6.3.1 As an alternative to the requirements of CISPR 12 (fifth edition 2001 and Amd1:2005) for vehicles of category L the test

surface may be any location that fulfils the conditions shown in the figure 8. In this case the measuring equipment must lie outside the part shown in the figures 8 and 9..

56-2.6.3.2 Enclosed test facilities may be used if correlation can be shown between the results obtained in the enclosed test facility and those obtained at an outdoor site. Enclosed test facilities do not need to meet the dimensional requirements of the outdoor site other than the distance from the antenna to the vehicle and the height of the antenna.

56-2.6.4 Testing requirements

56-2.6.4.1 The limits apply throughout the frequency range 30 to 1,000 MHz for measurements performed in a semi anechoic chamber or an outdoor test site.

56-2.6.4.2 Measurements can be performed with either quasi-peak or peak detectors. The limits given in paragraphs 56-2.4.2 and 56-2.4.5 of this Regulation are for quasi-peak detectors. If peak detectors are used a correction factor of 20 dB as defined in CISPR 12 (fifth edition 2001 and Amd1:2005) shall be applied.

56-2.6.4.3 Measurements


The Technical Service shall perform the test at the intervals specified in the CISPR 12 (fifth edition2001 and Amd1: 2005) standard throughout the frequency range 30 to 1,000 MHz.

Alternatively, if the manufacturer provides measurement data for the whole frequency band from a test laboratory accredited to the applicable parts of ISO 17025 (second edition 2005 and Corrigendum:2006) and recognized by the Approval Authority, the Technical Service may divide the frequency range in 14 frequency bands 30 - 34, 34 - 45, 45 - 60, 60 - 80, 80 - 100, 100 - 130, 130 - 170, 170 - 225, 225 - 300, 300-400, 400 - 525, 525 - 700, 700 - 850, 850 -1,000 MHz and perform tests at the 14 frequencies giving the highest emission levels within each band to confirm that the vehicle meets the requirements of this annex.

In the event that the limit is exceeded during the test, investigations shall be made to ensure that this is due to the vehicle and not to background radiation.

56-2.6.4.4 Readings

The maximum of the readings relative to the limit (horizontal and vertical polarization and antenna location on the left and right-hand sides of the vehicle) in each of the 14 frequency bands shall be taken as the characteristic reading at the frequency at which the measurements were made.

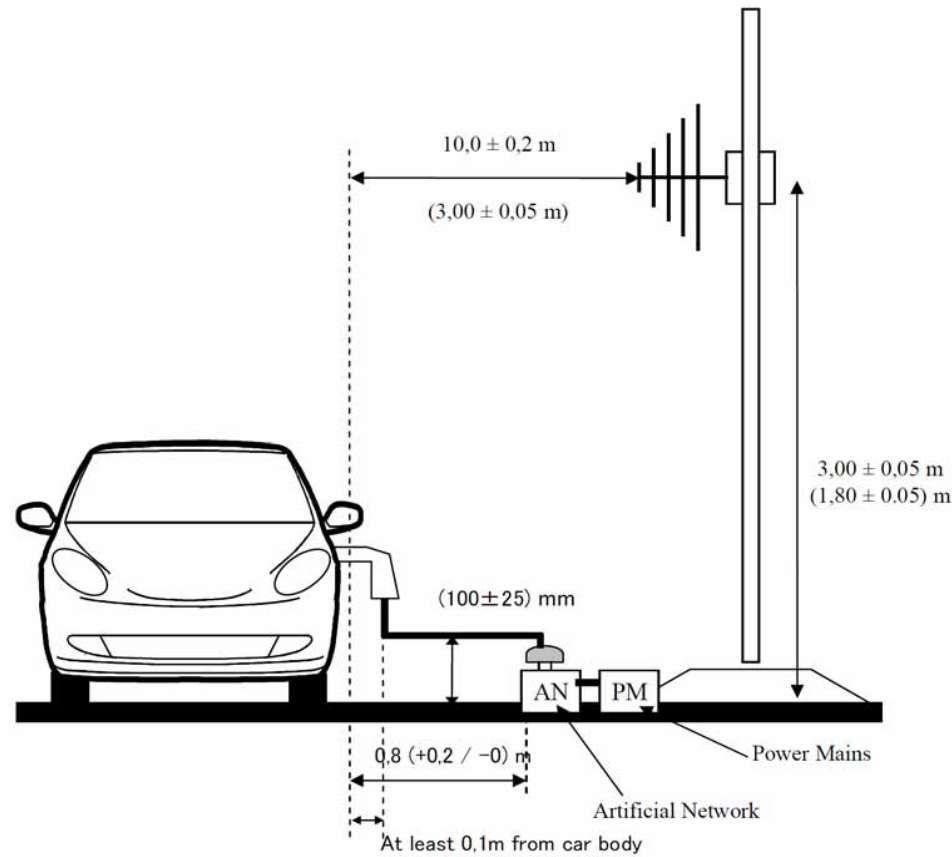

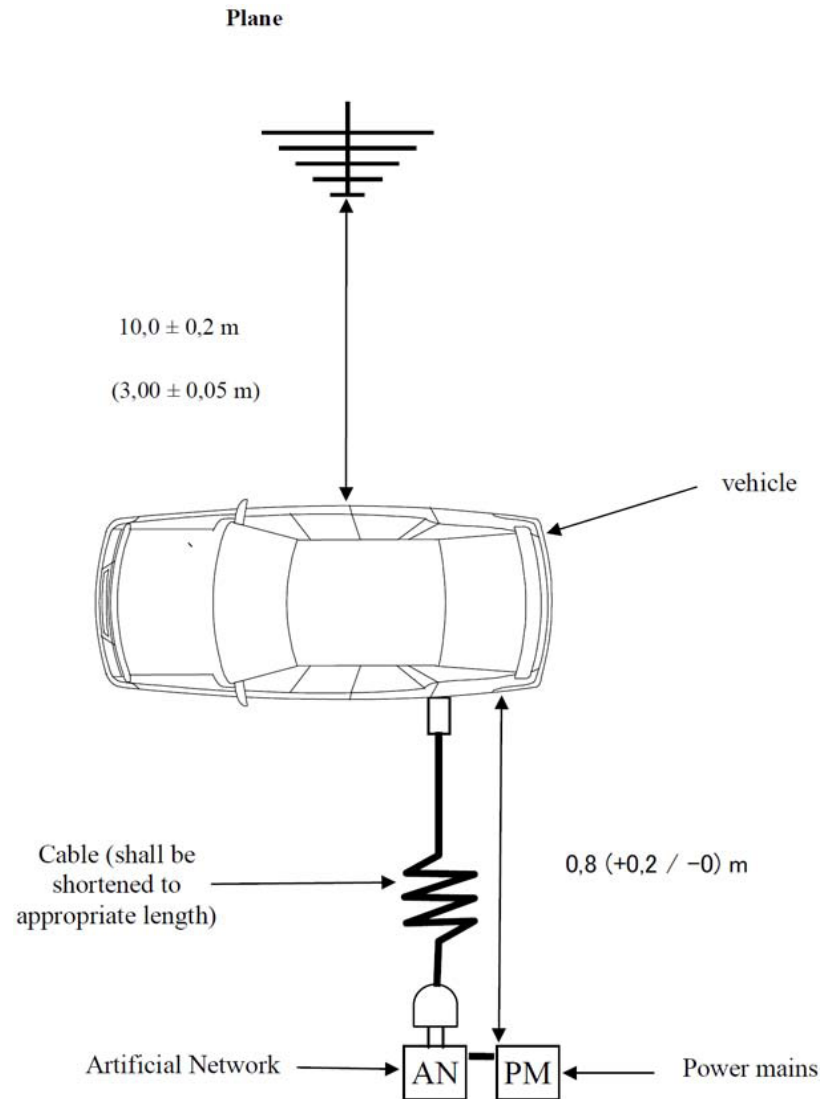
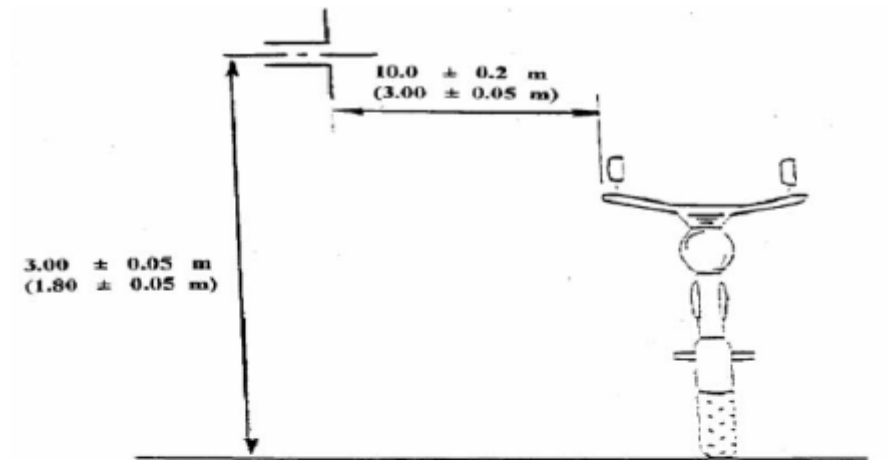


Figure 7: Vehicle in configuration "RESS charging mode" coupled to the power grid

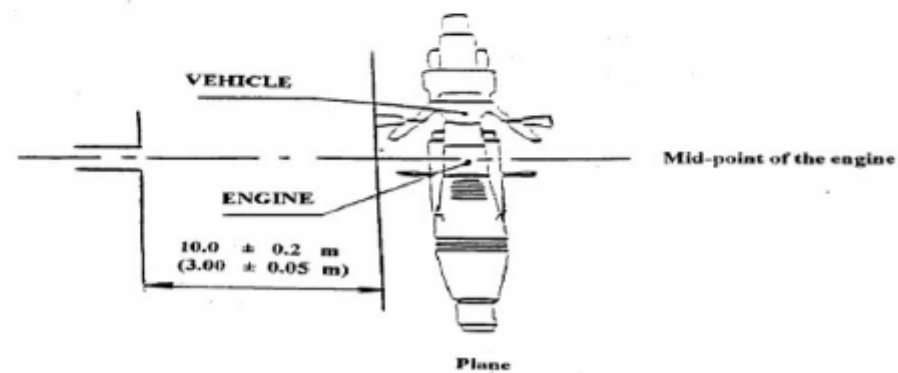


Figure 8: Clear horizontal surface free of electromagnetic reflection delimitation of the surface defined by an ellipse



Elevation

Dipole antenna in position to measure the vertical radiation components



Plane

Dipole antenna in position to measure the horizontal radiation components

Figure 9: Position of antenna in relation to the vehicle

56-2.7 Method of measurement of radiated narrowband electromagnetic emissions from vehicles

56-2.7.1 General

56-2.7.1.1 The test method described in this annex shall only be applied to vehicles. This method concerns only the configuration of the vehicle other than "RESS in charging mode coupled to the power grid.

56-2.7.1.2 Test method

This test is intended to measure the narrowband electromagnetic emissions such as might emanate from microprocessor-based systems or other narrowband source.

If not otherwise stated in this annex the test shall be performed according to CISPR 12 (fifth edition 2001 and Amd1:2005) or to CISPR 25 (and corrigendum 2004).

56-2.7.1.3 As an initial step the levels of emissions in the Frequency Modulation (FM) band (76 to 108 MHz) shall be measured at the vehicle broadcast radio antenna with an average detector. If the level specified in paragraph 56-2.4.3.2.4. of this Regulation is not exceeded, then the vehicle shall be deemed to comply with the requirements of this annex in respect of that frequency band and the full test shall not be carried out.

56-2.7.1.4 As an alternative for vehicles of category L the measurement location can be chosen according to paragraph 56-2.5.3.

56-2.7.2 Vehicle state during tests

56-2.7.2.1 The ignition switch shall be switched on. The engine shall not be operating.

56-2.7.2.2 The vehicle's electronic systems shall all be in normal operating mode with the vehicle stationary.

56-2.7.2.3 All equipment which can be switched on permanently by the driver or passenger with internal oscillators > 9 kHz or repetitive signals should be in normal operation.

56-2.7.3 Test requirements

56-2.7.3.1 The limits apply throughout the frequency range 30 to 1,000 MHz for measurements performed in a semi anechoic chamber or an outdoor test site.

56-2.7.3.2 Measurements shall be performed with an average detector.

56-2.7.3.3 Measurements

The Technical Service shall perform the test at the intervals specified in the CISPR 12 (fifth edition 2001 and Amd1:2005) standard throughout the frequency range 30 to 1,000 MHz.

Alternatively, if the manufacturer provides measurement data for the whole frequency band from a test laboratory accredited to the applicable parts of ISO 17025 (second edition 2005 and Corrigendum:2006) and recognized by the Approval Authority, the Technical Service may divide the frequency range in 14 frequency bands 30 - 34, 34 - 45, 45 - 60, 60 - 80, 80 - 100, 100 - 130, 130 - 170, 170 - 225, 225 - 300, 300- 400, 400 - 525, 525 - 700, 700 - 850, 850 - 1,000 MHz and perform tests at the 14 frequencies giving the highest emission levels within each band to confirm that the vehicle meets the requirements of this annex.

In the event that the limit is exceeded during the test, investigations shall be made to ensure that this is due to the vehicle and not to background radiation including broadband radiation from any ESA.

56-2.7.3.4 Readings

The maximum of the readings relative to the limit (horizontal and vertical polarization and antenna location on the left and right-hand sides of the vehicle) in each of the 14 frequency bands shall be taken as the characteristic reading at the frequency at which the measurements were made.

56-2.8 Method of measurement of radiated broadband electromagnetic emissions from electrical/electronic sub-assemblies (ESAs)

56-2.8.1 General

56-2.8.1.1 The test method described in this annex may be applied to ESAs, which may be subsequently fitted to vehicles, which comply with paragraph 56-2.6.

56-2.8.1.2 Test method

This test is intended to measure broadband electromagnetic emissions from ESAs (e.g. ignition systems, electric motor, etc.).

If not otherwise stated in this annex the test shall be performed according CISPR 25 (second edition 2002 and corrigendum 2004).

56-2.8.2 ESA state during tests

56-2.8.2.1 Test method

This test is intended to measure broadband electromagnetic emissions from ESAs (e.g. ignition systems, electric motor, etc.). If not otherwise stated in this annex the test shall be performed according CISPR 25 (second edition 2002).

56-2.8.3 Test arrangement

56-2.8.3.1 The test shall be performed according to CISPR 25 (second edition 2002 and corrigendum 2004) clause 6.4. -ALSE method.

56-2.8.3.2 Alternative measuring location

As an alternative to an absorber lined shielded enclosure (ALSE) an open area test site (OATS), which complies with the requirements of CISPR 16-1-4 (edition 1.1 2004) may be used (see figure 10).

56-2.8.3.3 Ambient

To ensure that there is no extraneous noise or signal of a magnitude sufficient to affect materially the measurement, measurements shall be taken before or after the main test. In this measurement, the extraneous noise or signal shall be at least 6 dB below the limits of interference given in paragraph 56-2.4.5.2.1 of this Regulation, except for intentional narrowband ambient transmissions.

56-2.8.4 Test requirements

56-2.8.4.1 The limits apply throughout the frequency range 30 to 1,000 MHz for measurements performed in a semi anechoic chamber or an outdoor test site.

56-2.8.4.2 Measurements can be performed with either quasi-peak or peak detectors. The limits given in paragraphs 56-2.4.2 and 56-2.4.5. of this Regulation are for quasi-peak detectors. If peak detectors are used a correction factor of 20 dB as defined in CISPR 12 (fifth edition 2001 and Amd1:2005) shall be applied.

56-2.8.4.3 Measurements

The Technical Service shall perform the test at the intervals specified in the CISPR 12 (fifth edition 2001 and Amd1:2005) standard throughout the frequency range 30 to 1,000 MHz.

Alternatively, if the manufacturer provides measurement data for the whole frequency band from a test laboratory accredited to the applicable parts of ISO 17025 (second edition 2005 and Corrigendum:2006) and recognized by the Approval Authority, the Technical Service may divide the frequency range in 14 frequency bands: 30 - 34, 34 - 45, 45 - 60, 60 - 80, 80 - 100, 100 - 130, 130 - 170, 170 - 225, 225 - 300, 300 - 400, 400 - 525, 525 - 700, 700 - 850, 850 - 1,000 MHz and perform tests at the 14 frequencies giving the highest emission levels within each band to confirm that the ESA meets the requirements of this annex.

In the event that the limit is exceeded during the test, investigations shall be made to ensure that this is due to the ESA and not to background radiation.

56-2.8.4.4 Readings

The maximum of the readings relative to the limit (horizontal/vertical polarization) in each of the 14 frequency bands shall be taken as the characteristic reading at the frequency at which the measurements were made.

Open area test site: Electrical/electronic sub-assembly test area boundary

Level clear area free from electromagnetic reflecting surfaces

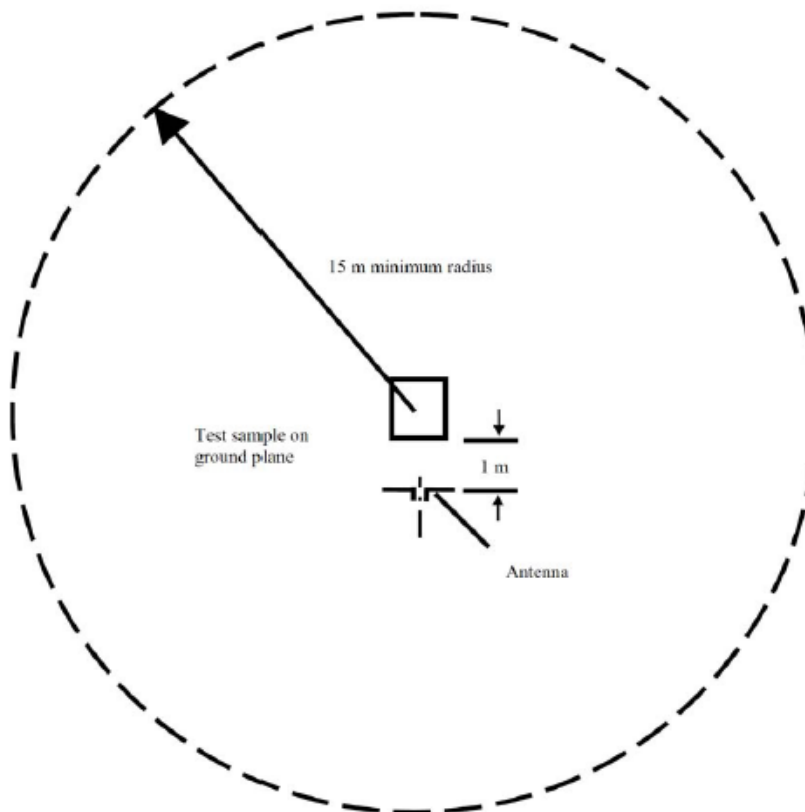


Figure 10

56-2.9 Method of measurement of radiated narrowband electromagnetic emissions from electrical /electronic sub-assemblies (ESAs) .

56-2.9.1 General

56-2.9.1.1 The test method described in this annex may be applied to ESAs, which may be subsequently fitted to vehicles, which

comply, with paragraph 56-2.7.

56-2.9.1.2 Test method

This test is intended to measure the narrowband electromagnetic emissions such as might emanate from a microprocessor-based system.

If not otherwise stated in this annex the test shall be performed according to CISPR 25 (second edition 2002 and corrigendum 2004).

56-2.9.2 ESA state during tests

The ESA under test shall be in normal operation mode.

56-2.9.3 Test arrangement

56-2.9.3.1 The test shall be performed according CISPR 25 (second edition 2002 and corrigendum 2004) clause 6.4. -ALSE method.

56-2.9.3.2 Alternative measuring location

As an alternative to an absorber lined shielded enclosure (ALSE) an open area test site (OATS) which complies with the requirements of CISPR 16-1-4 (third edition 2010) may be used (as shown in figure 10.).

56-2.9.3.3 Ambient

To ensure that there is no extraneous noise or signal of a magnitude sufficient to affect materially the measurement, measurements shall be taken before or after the main test. In this measurement, the extraneous noise or signal shall be at least 6 dB below the limits of interference given in paragraph 56-2.4.6.2.1. of this Regulation, except for intentional narrowband ambient transmissions.

56-2.9.4 Test requirements

56-2.9.4.1 The limits apply throughout the frequency range 30 to 1,000 MHz for measurements performed in semi anechoic chambers or outdoor test sites.

56-2.9.4.2 Measurements shall be performed with an average detector.

56-2.9.4.3 Measurements

The Technical Service shall perform the test at the intervals specified in the CISPR 12 (fifth edition 2001 and Amd1:2005) standard throughout the frequency range 30 to 1,000 MHz.

Alternatively, if the manufacturer provides measurement to data for the whole frequency band from a test laboratory accredited to the applicable parts of ISO 17025 (second edition 2005 and corrigendum:2006) and recognized by the Approval Authority, the Technical Service may divide the frequency range in 14 frequency bands 30 - 34, 34 - 45, 45 - 60, 60 - 80, 80 - 100, 100 - 130, 130 - 170, 170 - 225, 225 - 300, 300 - 400, 400 - 525, 525 - 700, 700 - 850, 850 - 1,000 MHz and perform tests at the 14 frequencies giving the highest emission levels within each band to confirm that the ESA meets the requirements of this annex. In the event that the limit is exceeded during the test, investigations shall be made to ensure that this is due to the ESA and not to background radiation including broadband radiation from the ESA.

56-2.9.4.4 Readings

The maximum of the readings relative to the limit (horizontal/vertical polarisation) in each of the 14 frequency bands shall be

taken as the characteristic reading at the frequency at which the measurements were made.

56-2.10 Method of testing for immunity of vehicles to electromagnetic radiation

56-2.10.1 General

56-2.10.1.1 The test method described in this paragraph shall only be applied to vehicles. This method concerns both configurations of vehicle:

- (a) other than "RESS in charging mode coupled to the power grid".
- (b) "RESS in charging mode coupled to the power grid".

56-2.10.1.2 Test method

This test is intended to demonstrate the immunity of the vehicle electronic systems. The vehicle shall be subject to electromagnetic fields as described in this paragraph. The vehicle shall be monitored during the tests.

If not otherwise stated in this annex the test shall be performed according to ISO 11451-2, third edition 2005.

56-2.10.1.3 Alternative test methods

The test may be alternatively performed in an outdoor test site for all vehicles. The test facility shall comply with (national) legal requirements regarding the emission of electromagnetic fields.

If a vehicle is longer than 12 m and/or wider than 2.60 m and/or higher than 4.00 m, BCI(bulk current injection) method according to ISO 11451-4 (first edition 1995) can be used in the frequency range 20 to 2,000 MHz with levels defined in paragraph 56-2.4.7.2.1 .of this Regulation.

56-2.10.2 Vehicle state during tests

56-2.10.2.1 Vehicle in configuration other than "RESS in charging mode coupled to the power grid".

56-2.10.2.2 Vehicle in configuration "RESS in charging mode coupled to the power grid". (See figure 11)

56-2.10.2.2.1 The vehicle shall be in an unladen condition except for necessary test equipment.

56-2.10.2.2.1.1 The vehicle shall be immobilized, engine OFF and in charging mode.

56-2.10.2.2.1.2 Basic vehicle conditions

The paragraph defines minimum test conditions (as far as applicable) and failures criteria for vehicle immunity tests. Other vehicle systems, which can affect immunity related functions, must be tested in a way to be agreed between manufacturer and Technical Service.

| "RESS in charging mode" vehicle test conditions | Failure criteria |
|---|------------------------|
| The RESS shall be in charging mode. The RESS state of charge shall be agreed in between the manufacturer and the Technical Service. | Vehicle sets in motion |

56-2.10.2.2.1.3 All other equipment which can be switched on permanently by the driver or passenger should be OFF.

56-2.10.2.2.2 Only non-perturbing equipment shall be used while monitoring the vehicle. The vehicle exterior and the passenger compartment shall be monitored to determine whether the requirements of this annex are met (e.g. by using (a) video camera(s), a microphone, etc.).

56-2.10.2.3 The vehicle shall be in an unladen condition except for necessary test equipment.

56-2.10.2.3.1 The engine shall normally turn the driving wheels at a steady speed of 50 km/h if there is no technical reason due to the vehicle to define a different condition. For vehicles of categories L1 and L2 the steady speed shall normally be turned at 25 km/h. The vehicle shall be on an appropriately loaded dynamometer or alternatively supported on insulated axle stands with minimum ground clearance if no dynamometer is available. Where appropriate, transmission shafts, belts or chains may be disconnected (e.g. trucks, two and three-wheel vehicles).

56-2.10.2.3.2 Basic vehicle conditions

The paragraph defines minimum test conditions (as far as applicable) and failures criteria for vehicle immunity tests. Other vehicle systems, which can affect immunity related functions must be tested in a way to be agreed between manufacturer and Technical Service.

| "50 km/h cycle" vehicle test conditions | Failure criteria |
|---|---|
| Vehicle speed 50 km/h (respectively 25 km/h for L1, L2 vehicles) +/- 20 per cent (vehicle driving the rollers). If the vehicle is equipped with a cruise control system, it shall be operational. | Speed variation greater than +/- 10 per cent of the nominal speed. In case of automatic gearbox: change of gear ratio inducing a speed variation greater than +/- 10 per cent of the nominal speed. |
| Dipped beams ON (manual mode) | Lighting OFF |
| Front wiper ON (manual mode) maximum speed | Complete stop of front wiper |
| Direction indicator on driver's side ON | Frequency change (lower than 0.75 Hz or greater than 2.25 Hz). Duty cycle change (lower than 25 per cent or greater than 75 per cent). |
| Adjustable suspension in normal position | Unexpected significant variation |
| Driver's seat and steering wheel in medium position | Unexpected variation greater than 10 per cent of total range |
| Alarm unset | Unexpected activation of alarm |
| Horn OFF | Unexpected activation of horn |
| Airbag and safety restraint systems operational with inhibited passenger airbag if this function exists | Unexpected activation |
| Automatic doors closed | Unexpected opening |
| Adjustable endurance brake lever in normal position | Unexpected activation |

| "Brake cycle" vehicle test conditions | Failure criteria |
|--|--|
| To be defined in brake cycle test plan. This must include operation of the brake pedal (unless there are technical reasons not to do so) but not necessarily an anti-lock brake system action. | Stop lights inactivated during cycle Brake warning light ON with loss of function. Unexpected activation |

56-2.10.2.3.3 All equipment which can be switched on permanently by the driver or passenger should be in normal operation.

56-2.10.2.3.4 All other systems which affect the driver's control of the vehicle shall be (on) as in normal operation of the vehicle.

56-2.10.2.4 If there are vehicle electrical/electronic systems which form an integral part of the direct control of the vehicle, which will not operate under the conditions described in paragraph 56-2.10.2.3. , it will be permissible for the manufacturer to provide a report or additional evidence to the Technical Service that the vehicle electrical/electronic system meets the requirements of this Regulation. Such evidence shall be retained in the type approval documentation.

56-2.10.2.5 Only non-perturbing equipment shall be used while monitoring the vehicle. The vehicle exterior and the passenger compartment shall be monitored to determine whether the requirements are met (e.g. by using (a) video camera(s), a microphone, etc.).

56-2.10.3 Reference point

56-2.10.3.1 For the purposes of this paragraph, the reference point is the point at which the field strength shall be established and shall be defined as follows:

56-2.10.3.2 For category M, N, O vehicles according to ISO 11451-2, third edition 2005.

56-2.10.3.3 For category L vehicles:

56-2.10.3.3.1 at least 2 m horizontally from the antenna phase centre or at least 1 m vertically from the radiating elements of a transmission-line-system (TLS);

56-2.10.3.3.2 on the vehicle's centre line (plane of longitudinal symmetry);

56-2.10.3.3.3 at a height of 1.0 +/- 0.05 m above the plane on which the vehicle rests or 2.0 +/- 0.05m if the minimum height of the

- roof of any vehicle in the model range exceeds 3.0 m,
- 56-2.10.3.3.4 At 1.0 +/- 0.2 m below the vertical centerline of the vehicle's front wheel (point C in figure 12) in the case of vehicle of category L2 and L5. ; or at 0.2 +/- 0.2 m behind the vertical centerline of the vehicle's front wheel (point D in figure 12-1) in the case of two-wheeled vehicles.
- 56-2.10.3.3.5 If it is decided to radiate the rear of the vehicle, the reference point shall be established as in paragraphs 56-2.10.3.3.1. to 56-2.10.3.3.4. The vehicle shall then be installed facing away from the antenna and positioned as if it had been horizontally rotated 180 around its centre point, i.e. such that the distance from the antenna to the nearest part of the outer body of the vehicle remains the same. This is illustrated in figure 13.

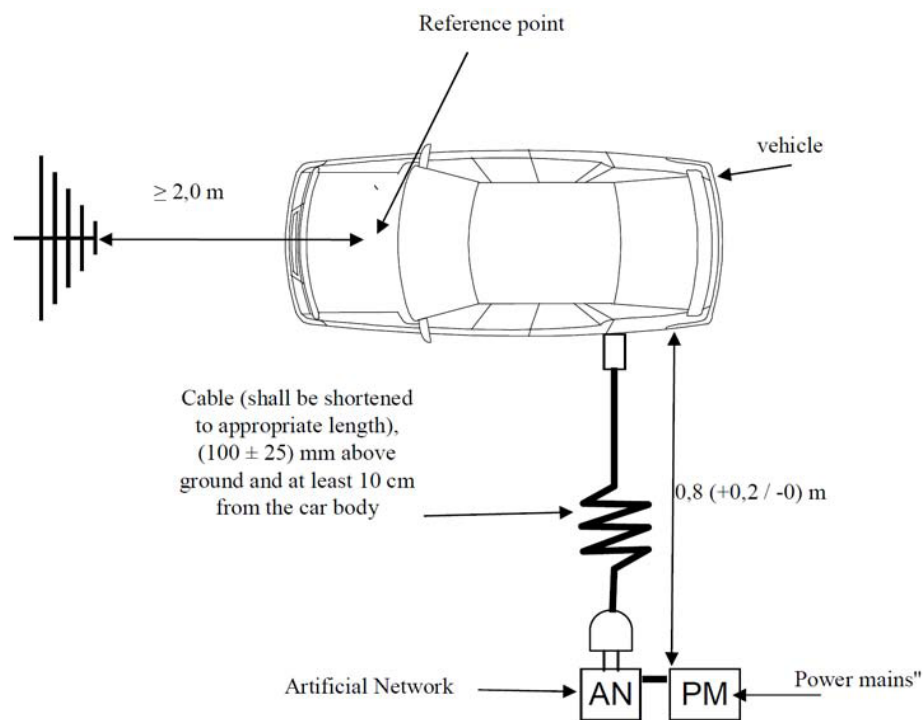


Figure 11: Vehicle in configuration "RESS in charging mode coupled to the power grid

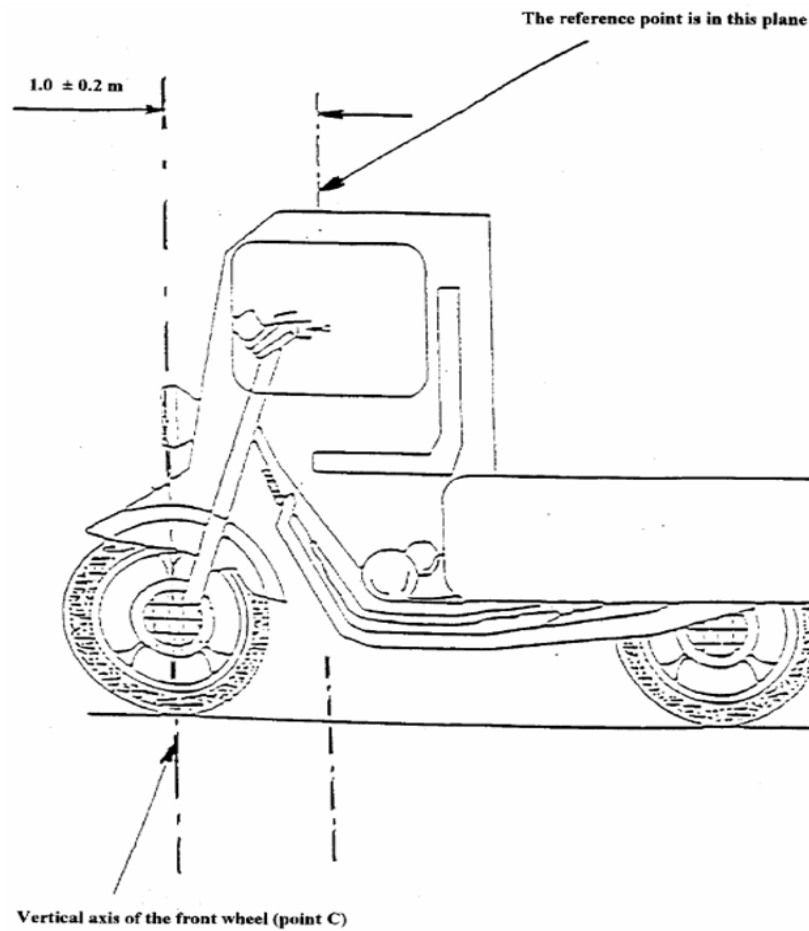


Figure 12

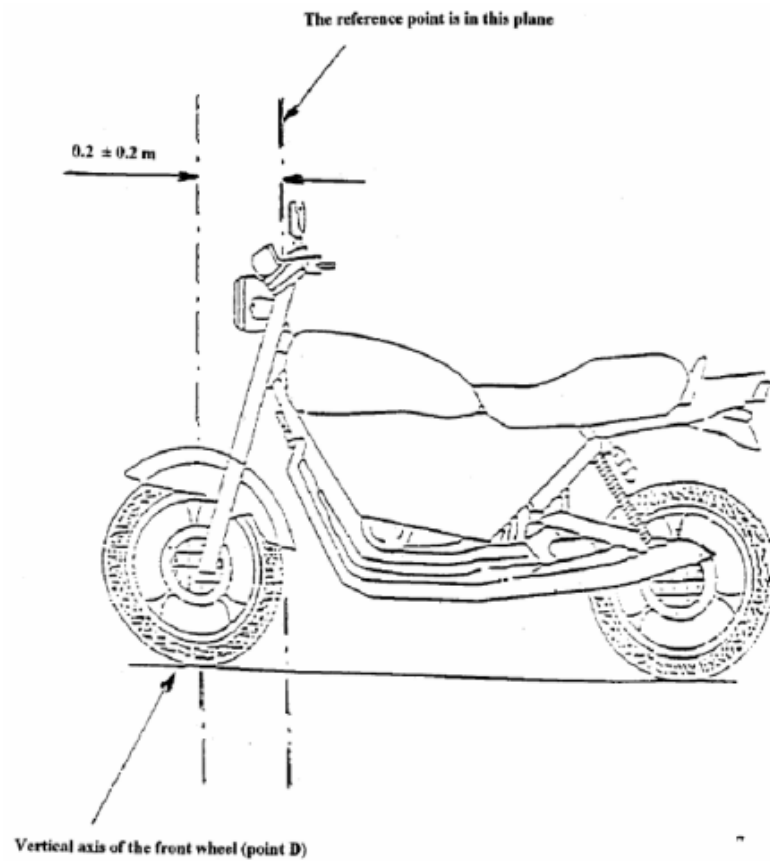


Figure 12-1

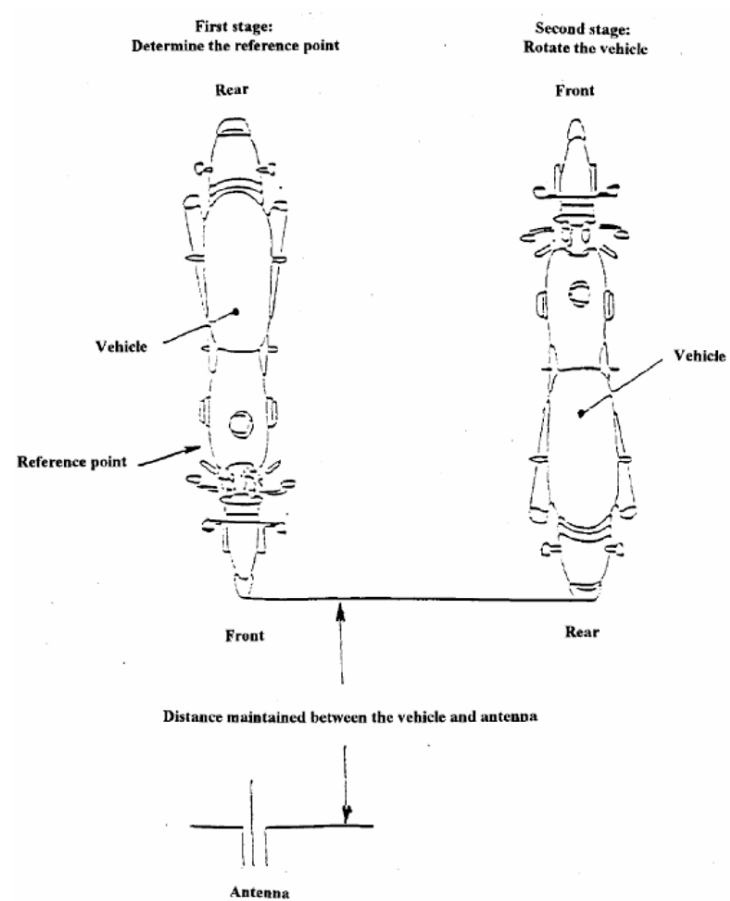


Figure 13

56-2.10.4 Test requirements

56-2.10.4.1 Frequency range, dwell times, polarization.

The vehicle shall be exposed to electromagnetic radiation in the 20 to 2,000 MHz frequency ranges in vertical polarization. The test signal modulation shall be:

The official directions are written in Chinese, this English edition is for your reference only

56-2 Electromagnetic Compatibility

- (a) AM (amplitude modulation), with 1 kHz modulation and 80 per cent modulation depth in the 20 to 800 MHz frequency range, and
- (b) PM (pulse modulation), with 577 microseconds, period 4,600 microseconds in the 800 to 2,000 MHz frequency range, if not otherwise agreed between Technical Service and vehicle manufacturer. Frequency step size and dwell time shall be chosen according to ISO 11451-1, third edition 2005 and Amd1:2008..

56-2.10.4.1.1 The Technical Service shall perform the test at the intervals specified in ISO 11451-1, third edition 2005 and Amd1:2008 throughout the frequency range 20 to 2,000 MHz.

Alternatively, if the manufacturer provides measurement data for the whole frequency band from a test laboratory accredited to the applicable parts of ISO 17025 (second edition 2005 and Corrigendum:2006) and recognized by the Approval Authority, the Technical Service may choose a reduced number of spot frequencies in the range, e.g. 27, 45, 65, 90, 120, 150, 190, 230, 280, 380, 450, 600, 750, 900, 1,300, and 1,800 MHz to confirm that the vehicle meets the requirements.

If a vehicle fails the test defined in this paragraph, it must be verified as having failed under the relevant test conditions and not as a result of the generation of uncontrolled fields.

56-2.10.5 Generation of required field strength

56-2.10.5.1 Test methodology

56-2.10.5.1.1 The substitution method according to ISO 11451-1, third edition 2005 and Amd1:2008 shall be used to establish the test field conditions.

56-2.10.5.1.2 Calibration

For TLS one field probe at the facility reference point shall be used. For antennas four field probes at the facility reference line shall be used.

56-2.10.5.1.3 Test phase

The vehicle shall be positioned with the centre line of the vehicle on the facility reference point or line. The vehicle shall normally face a fixed antenna. However, where the electronic control units and the associated wiring harness are predominantly in the rear of the vehicle, the test should normally be carried out with the vehicle facing away from the antenna.

In the case of long vehicles (i.e. excluding vehicles of categories L, M1 and N1), which have electronic control units and associated wiring harness predominantly towards the middle of the vehicle, a reference point may be established based on either the right side surface or the left side surface of the vehicle. This reference point shall be at the midpoint of the vehicle's length or at one point along the side of the vehicle chosen by the manufacturer in conjunction with the Competent Authority after considering the distribution of electronic systems and the layout of any wiring harness.

Such testing may only take place if the physical construction of the chamber permits. The antenna location must be noted in the test report

56-2.11 Method(s) of testing for immunity of electrical/electronic subassemblies to electromagnetic radiation

56-2.11.1 General

56-2.11.1.1 The test method(s) described in this paragraph applies to ESAs.

56-2.11.1.2 ESAs may comply with the requirements of any combination of the following test methods at the manufacturer's discretion provided that this results in the full frequency range specified in paragraph 56-2.11.3.1:

- (a) Absorber chamber test according ISO 11452-2, second edition 2004;
- (b) TEM cell testing according ISO 11452-3, third edition 2001;
- (c) Bulk current injection testing according ISO 11452-4, third edition 2005 and Corrigendum 1:2009;;
- (d) Stripline testing according ISO 11452-5, second edition 2002;
- (e) 800 mm stripline according paragraph 56-2.11.4.5. of this regulation. (Frequency range and general test conditions shall be based on ISO 11452-1, third edition 2005 and Amd1:2008).

56-2.11.2 State of ESA during tests

56-2.11.2.1 The test conditions shall be according ISO 11452-1, third edition 2005 and Amd1:2008..

56-2.11.2.2 The ESA under test shall be switched on and must be stimulated to be in normal operation condition. It shall be arranged as defined in this paragraph unless individual test methods dictate otherwise.

56-2.11.2.3 Any extraneous equipment required to operate the ESA under test shall not be in place during the calibration phase. No extraneous equipment shall be closer than 1 m from the reference point during calibration.

56-2.11.2.4 To ensure reproducible measurement results are obtained when tests and measurements are repeated, the test signal generating equipment and its layout shall be to the same specification as that used during each appropriate calibration phase.

56-2.11.2.5 If the ESA under test consists of more than one unit, the interconnecting cables should ideally be the wiring harnesses as intended for use in the vehicle. If these are not available, the length between the electronic control unit and the AN shall be as defined in the standard. All cables in the wiring harness should be terminated as realistically as possible and preferably with real loads and actuators.

56-2.11.3 General test requirements

56-2.11.3.1 Frequency range, dwell times Measurements shall be made in the 20 to 2,000 MHz frequency range with frequency steps according to ISO 11452-1, third edition 2005 and Amd1:2008..The test signal modulation shall be:

- (a) AM (amplitude modulation), with 1 kHz modulation and 80 per cent modulation depth in the 20 to 800 MHz frequency range;
- (b) PM (pulse modulation), t on 577 microseconds, period 4,600 microseconds in the 800 to 2,000 MHz frequency range, if not otherwise agreed between Technical Service and ESA manufacturer.

Frequency step size and dwell time shall be chosen according to ISO 11452-1, third edition 2005 and Amd1:2008..

56-2.11.3.2 The Technical Service shall perform the test at the intervals specified in ISO 11452-1, third edition 2005 and Amd1:2008 throughout the frequency range 20 to 2,000 MHz.

Alternatively, if the manufacturer provides measurement to data for the whole frequency band from a test laboratory accredited to the applicable parts of ISO 17025, (second edition 2005 and Corrigendum:2006) and recognized by the Approval Authority, the Technical Service may choose a reduced number of spot frequencies in the range, e.g. 27, 45, 65, 90, 120, 150, 190, 230,280, 380, 450, 600, 750, 900, 1,300, and 1,800 MHz to confirm that the ESA meets the requirements of this paragraph.

56-2.11.4 Special test requirements

56-2.11.4.1 Absorber chamber test

56-2.11.4.1.1 Test method

This test method allows the testing of vehicle electrical/electronic systems by exposing an ESA to electromagnetic radiation generated by an antenna.

56-2.11.4.1.2 Test methodology

The "substitution method" shall be used to establish the test field conditions according ISO 11452-2, second edition 2004.

The test shall be performed with vertical polarization.

56-2.11.4.2 TEM cell testing (see table 12)

56-2.11.4.2.1 Test method

The TEM (transverse electromagnetic mode) cell generates homogeneous fields between the internal conductor (septum) and housing (ground plane).

56-2.11.4.2.2 Test methodology

The test shall be performed according ISO 11452-3, third edition 2001.

Depending on the ESA to be tested the Technical Service shall chose the method of maximum field coupling to the ESA or to the wiring harness inside the TEM-cell.

56-2.11.4.3 Bulk current injection testing

56-2.11.4.3.1 Test method

This is a method of carrying out immunity tests by inducing currents directly into a wiring harness using a current injection probe.

56-2.11.4.3.2 Test methodology

The test shall be performed according to ISO 11452-4, third edition 2005 and Corrigendum 1:2009 on a test bench. As an alternative the ESA may be tested while installed in the vehicle according to ISO 11451-4 (first edition 1995) with the following characteristics:

- (a) the injection probe shall be positioned in 150 mm distance to the ESA to be tested;
- (b) the reference method shall be used to calculate injected currents from forward power;
- (c) the frequency range of the method is limited by the injection probe specification.

56-2.11.4.4 Stripline testing

56-2.11.4.4.1 Test method

This test method consists of subjecting the wiring harness connecting the components in an ESA to specified field strengths.

56-2.11.4.4.2 Test methodology

The test shall be performed according ISO 11452-5, second edition 2002.

56-2.11.4.5 800 mm stripline testing

56-2.11.4.5.1 Test method

The stripline consists of two parallel metallic plates separated by 800 mm. Equipment under test is positioned centrally between the plates and subjected to an electromagnetic field. (see figure 14, figure 15)

This method can test complete electronic systems including sensors and actuators as well as the controller and wiring loom. It is suitable for apparatus whose largest dimension is less than one -third of the plate separation.

56-2.11.4.5.2 Test methodology

56-2.11.4.5.2.1 Positioning of stripline

The stripline shall be housed in a screened room (to prevent external emissions) and positioned 2 m away from walls and any metallic enclosure to prevent electromagnetic reflections. RF absorber material may be used to damp these reflections. The stripline shall be placed on non-conducting supports at least 0.4 m above the floor.

56-2.11.4.5.2.2 Calibration of the stripline

A field-measuring probe shall be positioned within the central one-third of the longitudinal, vertical and transverse dimensions of the space between the parallel plates with the system under test absent. The associated measuring equipment shall be sited outside the screen room. At each desired test frequency, a level of power shall be fed into the stripline to produce the required field strength at the antenna. This level of forward power, or another parameter directly related to the forward power required to define the field, shall be used for type approval tests unless changes occur in the facilities or equipment, which necessitate this procedure being repeated.


56-2.11.4.5.2.3 Installation of the ESA under test

The main control unit shall be positioned within the central one third of the longitudinal, vertical and transverse dimensions of the space between the parallel plates. It shall be supported on a stand made from non-conducting material.

56-2.11.4.5.2.4 Main wiring loom and sensor/actuator cables

The main wiring loom and any sensor/actuator cables shall rise vertically from the control unit to the top ground plate (this helps to maximize coupling with the electromagnetic field). Then they shall follow the underside of the plate to one of its free edges where they shall loop over and follow the top of the ground plate as far as the connections to

the stripline feed. The cables shall then be routed to the associated equipment, which shall be sited in an area outside the influence of the electromagnetic field, e.g.: on the floor of the screened room 1 m longitudinally away from the stripline.

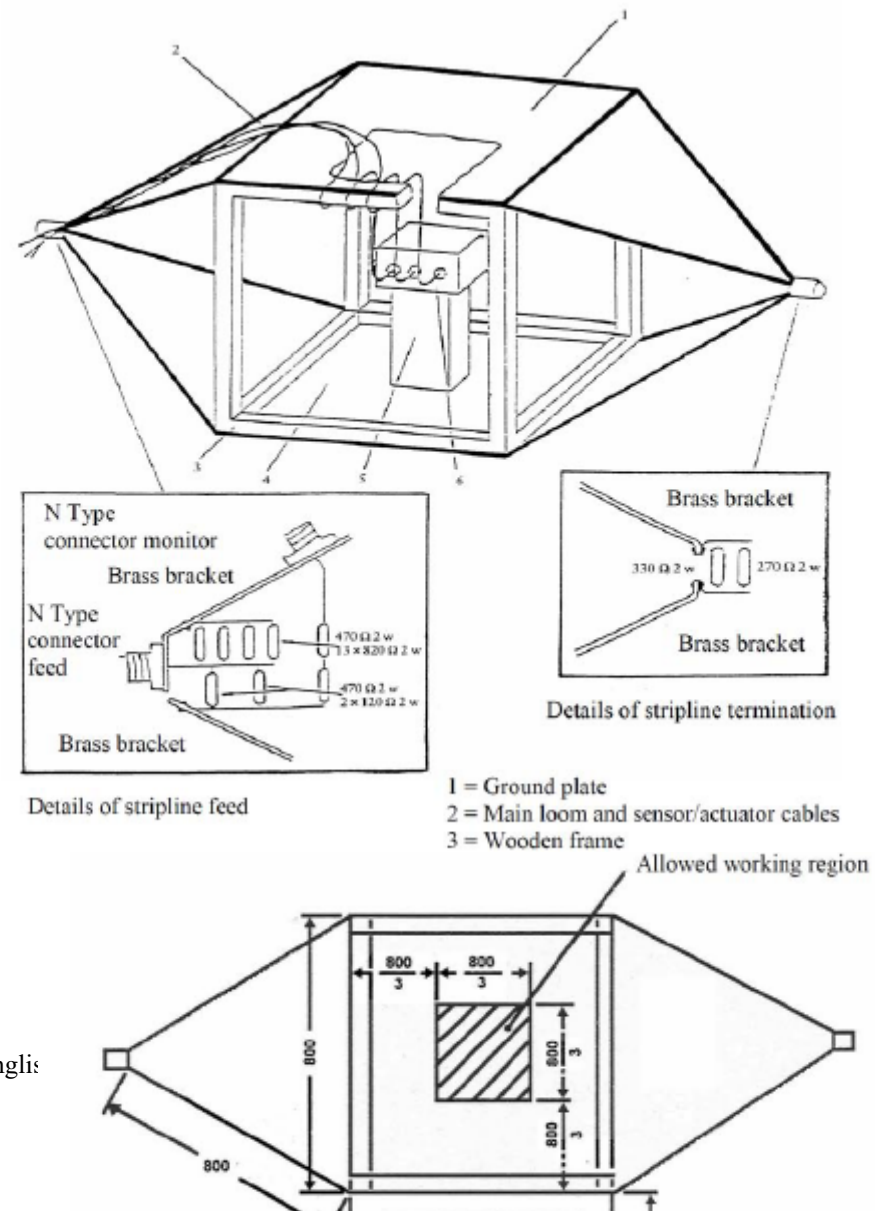

The official directions are written in Chinese, this English

Compatibility

Figure 15: 800 mm stripline dimensions

Table 12: Typical TEM cell dimensions

| Upper frequency (MHz) | Cell form factor W : b | Cell form factor L/W | Plate separation b (cm) | Septum S (cm) |
|--------------------------|---------------------------|-------------------------|----------------------------|------------------|
| 200 | 1.69 | 0.66 | 56 | 70 |
| 200 | 1.00 | 1 | 60 | 50 |

56-2.12 Method(s)

56-2.12.1 General

This test method shall ensure the immunity of ESAs to conducted transients on the vehicle power supply and limit conducted transients from ESAs to the vehicle power supply.

56-2.12.2 Immunity against transient disturbances conducted along supply lines

Apply the test pulses 1, 2a, 2b, 3a 3b and 4 according to the International Standard ISO 7637-2, (second edition 2004 and Amd1:2008) to the supply lines as well as to other connections of ESAs which may be operationally connected to supply lines

56-2.12.3 Emission of transient conducted disturbances along generated by ESAS on supply lines

Measurement according to the International Standard ISO 7637-2 (second edition 2004 and Amd1:2008) on supply lines as well as to other connections of ESAs which may be operationally connected to supply lines.

56-2.13 Method(s) of Testing for Emission of Harmonics generated on AC power lines from vehicle.

56-2.13.1 General

56-2.13.1.1 The test method described in this annex shall be applied to vehicles in configuration "RESS charging mode coupled to the power grid"

56-2.13.1.2 Test method

This test is intended to measure the level of harmonics generated by vehicle in configuration "RESS charging mode coupled to the power grid" through its AC power lines in order to ensure it is compatible with residential, commercial and light industrial environments. If not otherwise stated in this annex the test shall be performed according to:

- (a) IEC 61000-3-2 (edition 3.2 - 2005 +Amd1:2008+Amd2:2009) for input current in charging mode ≤ 16 A per phase for class A equipment,
- (b) IEC 61000-3-12 (edition 1.0 - 2004) for input current in charging mode > 16 A and ≤ 75 A per phase.

56-2.13.2 Vehicle State during Tests

56-2.13.2.1 The vehicle shall be in configuration "RESS charging mode coupled to the power grid" at rated power until the AC current reached at least 80 per cent of its initial value

56-2.13.3 Test Arrangements

56-2.13.3.1 The observation time to be used for the measurements shall be as for quasi-stationary equipment as defined in IEC 61000-3-2 (edition 3.2 - 2005 +Amd1:2008+Amd2:2009) table 4.

56-2.13.3.2 The test set-up for single phase vehicle in configuration "RESS charging mode coupled to the power grid" is shown in figure 16.

56-2.13.3.3 The test set-up for three-phase vehicle in configuration "RESS charging mode coupled to the power grid" is shown in figure 17.

56-2.13.4 Test Requirements

56-2.13.4.1 The measurements of even and odd current harmonics shall be performed up to the fortieth harmonic.

56-2.13.4.2 The limits for single phase or three-phase "RESS charging mode coupled to the power grid" with input current ≤ 16 A per phase are given in paragraph 56-2.5.3.2.1. table 3.

56-2.13.4.3 The limits for single phase "RESS charging mode coupled to the power grid" with input current > 16 A and ≤ 75 A per phase are given in paragraph 56-2.5.3.2.2. table 4.

56-2.13.4.4 The limits for three-phase "RESS charging mode coupled to the power grid" with input current > 16 A and ≤ 75 A per phase

are given in paragraph 56-2.5.3.2.2. table 5.

56-2.13.4.5 . For three-phase "RESS charging mode coupled to the power grid" with input current $> 16 \text{ A}$ and $\leq 75 \text{ A}$ per phase, when at least one of the three conditions a), b), c) described in IEC 61000-3-12 (edition 1.0 - 2004) clause 5.2, is fulfilled then the limits given in paragraph 56-2.5.3.2.2. table 6 can be applied.

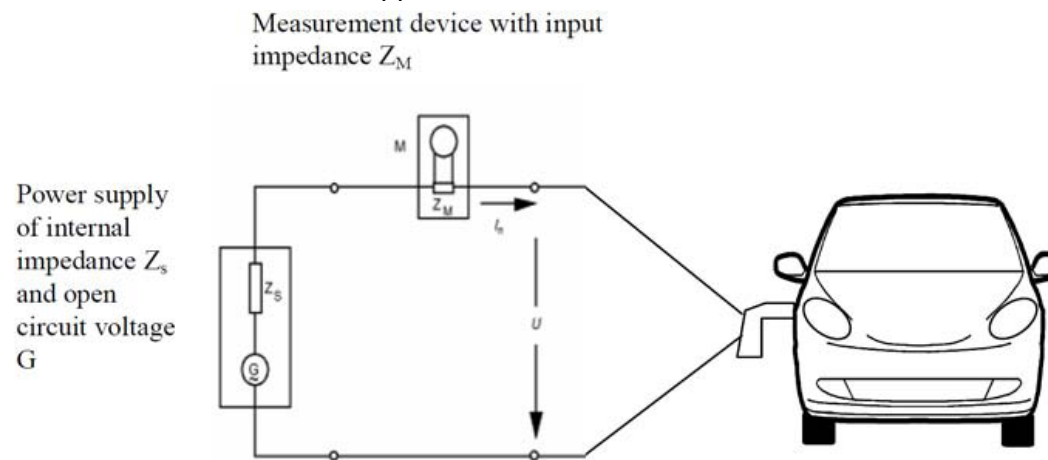


Figure 16: Vehicle in configuration "RESS charging mode coupled to the power grid" - Single phase charger test set-up

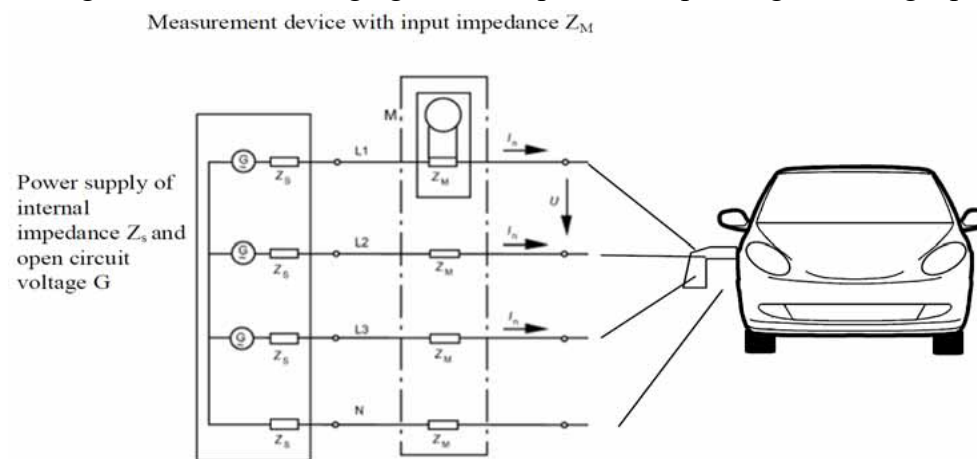


Figure 17: Vehicle in configuration "RESS charging mode coupled to the power grid" - Three-phase charger test set-up

56-2.14 Method(s) of testing for emission of voltage changes, voltage fluctuations and flicker on AC power lines from vehicle

56-2.14.1 General

56-2.14.1.1 The test method described in this annex shall be applied to vehicles in configuration "RESS charging mode coupled to the power grid"

56-2.14.1.2 Test method

This test is intended to measure the level of voltage changes, voltage fluctuations and flicker generated by vehicle in configuration "RESS charging mode coupled to the power grid" through its AC power lines in order to ensure it is compatible with residential, commercial and light industrial environments.

If not otherwise stated in this annex the test shall be performed according to:

- (a) IEC 61000-3-3 (edition 2.0 - 2008) for rated current in "RESS charging mode" ≤ 16 A per phase and not subjected to conditional connection,
- (b) IEC 61000-3-11 (edition 1.0 - 2000) for rated current in "RESS charging mode" > 16 A and ≤ 75 A per phase and subjected to conditional connection.

56-2.14.2 Vehicle State during Tests

56-2.14.2.1 The vehicle shall be in configuration "RESS charging mode coupled to the power grid" at rated power until the AC current reached at least 80 per cent of its initial value.

56-2.14.3 Test Arrangements

- 56-2.14.3.1 The tests for vehicle in configuration "RESS charging mode coupled to the power grid" with rated current ≤ 16 A per phase and not subjected to conditional connection shall be performed according IEC 61000-3-3 (edition 2.0 - 2008) paragraph 4.
- 56-2.14.3.2 The tests for vehicle in configuration "RESS charging mode coupled to the power grid" with rated current > 16 A and ≤ 75 A per phase and subjected to conditional connection shall be performed according IEC 61000-3-11 (edition 1.0 - 2000) paragraph 6.

56-2.14.3.3 The test set-up for vehicle in configuration "RESS charging mode coupled to the power grid" is shown in figure 18.

56-2.14.4 Test Requirements

- 56-2.14.4.1 The parameters to be determined in the time-domain are "short duration flicker value", "long duration flicker value" and "voltage relative variation".
- 56-2.14.4.2 The limits for vehicle in configuration "RESS charging mode coupled to the power grid" with input current ≤ 16 A per phase and not subjected to conditional connection are given in paragraph 56-2.5.4.2.1. table 7.
- 56-2.14.4.3 The limits for vehicle in configuration "RESS charging mode coupled to the power grid" with input current > 16 A and ≤ 75 A per phase and subjected to conditional connection are given in paragraph 56-2.5.4.2.2. table 8.

Power supply with open circuit
voltage G and $(R_p + j X_p)$
impedance

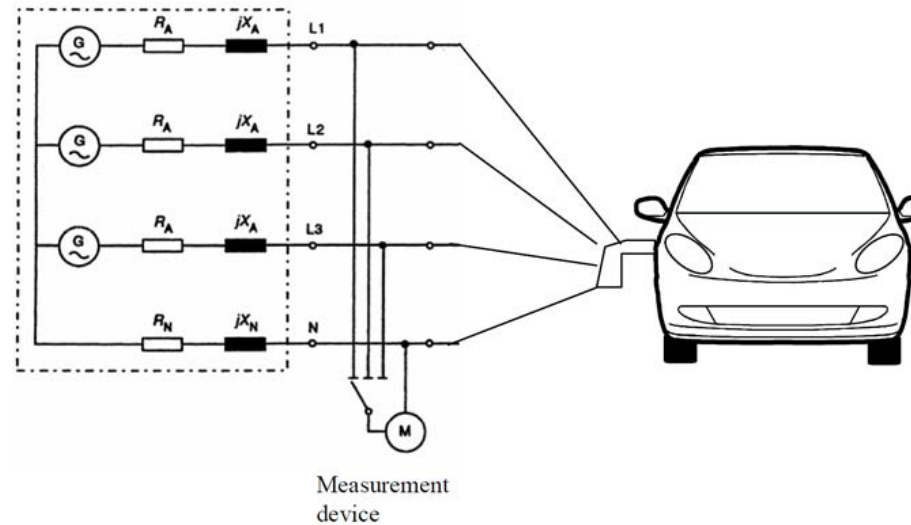


Figure 18: Vehicle in configuration "RESS charging mode coupled to the power grid"

56-2.15 Method(s) of Testing for Emission of Radiofrequency conducted disturbances on AC or DC power lines from vehicle

56-2.15.1 General

56-2.15.1.1 The test method described in this annex shall be applied to vehicles in configuration "RESS charging mode coupled to the power grid".

56-2.15.1.2 Test method

This test is intended to measure the level of radio frequency conducted disturbances generated by vehicle in configuration "RESS charging mode coupled to the power grid" through its AC or DC power lines in order to ensure it is compatible with residential, commercial and light industrial environments.

If not otherwise stated in this annex the test shall be performed according to CISPR 16-2-1 (edition 2.0 - 2008).

56-2.15.2 Vehicle state during tests

56-2.15.2.1 The vehicle shall be in configuration "RESS charging mode coupled to the power grid" at rated power until the AC or DC current reached at least 80 per cent of its initial value.

56-2.15.3 Test Arrangements

56-2.15.3.1 The test shall be performed according to CISPR 16-2-1 (edition 2.0 - 2008) clause 7.4.1. as floor-standing equipments.

56-2.15.3.2 The artificial mains network to be used for the measurement on vehicle is defined in CISPR 16-1-2 (edition 1.2: 2006), clause 4.3.

56-2.15.3.3 The test set-up for the connection of the vehicle in configuration "RESS charging mode coupled to the power grid" is shown in figure 19.

56-2.15.3.4 The measurements shall be performed with a spectrum analyser or a scanning receiver.

The parameters to be used are respectively defined in CISPR 25 (second edition 2002 and corrigendum 2004) clause 4.5.1 (table 1) and 4.5.2 (table 2).

56-2.15.4 Test Requirements

56-2.15.4.1 The limits apply throughout the frequency range 0,15 to 30 MHz for measurements performed in a semi anechoic chamber or an outdoor test site.

56-2.15.4.2 Measurements shall be performed with average and either or peak detectors.

The limits are given in paragraph 56-2.5.5. table 9 for AC lines and table 10 for DC lines. If peak detectors are used a correction factor of 20 dB as defined in CISPR 12 (fifth edition, 2001 and Amd1:2005) shall be applied.

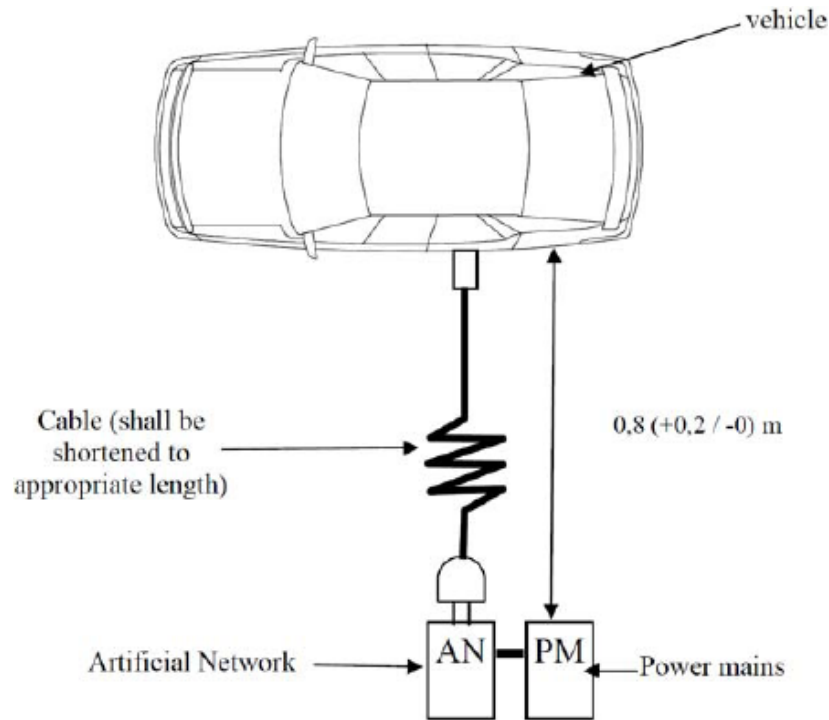


Figure 19: Vehicle in configuration "RESS charging mode coupled to the power grid"

56-2.16 Method(s) of Testing for Emission of Radiofrequency conducted disturbances on Network and Telecommunication access from Vehicle

56-2.16.1 General

56-2.16.1.1 The test method described in this annex shall be applied to vehicles in configuration "RESS charging mode coupled to the power grid".

56-2.16.1.2 Test method

This test is intended to measure the level of radio frequency conducted disturbances generated by vehicle in configuration "RESS charging mode coupled to the power grid" through its network and telecommunication access in order to ensure it is compatible with residential, commercial and light industrial environments.

If not otherwise stated in this annex the test shall be performed according to CISPR 22 (edition 6.0 - 2008).

56-2.16.2 Vehicle/ ESA State during Tests

56-2.16.2.1 The vehicle shall be in configuration "RESS charging mode coupled to the power grid" at rated power until the AC or DC

current reached at least 80 per cent of its initial value.

56-2.16.3 Test Arrangements

56-2.16.3.1 The test set-up shall be performed according to CISPR 22 (edition 6.0 - 2008) paragraph 5 for conducted emissions.

56-2.16.3.2 The impedance stabilisation to be used for the measurement on vehicle is defined in CISPR 22 (edition 6.0 - 2008) paragraph 9.6.2.

56-2.16.3.3 The test set-up for the connection of the vehicle in configuration "RESS charging mode coupled to the power grid" is shown in figure 20.

56-2.16.3.4 The measurements shall be performed with a spectrum analyser or a scanning receiver.

The parameters to be used are respectively defined in CISPR 25 (second edition 2002 and corrigendum 2004) clause 4.5.1 (table 1) and 4.5.2 (table 2).

56-2.16.4 Test Requirements

56-2.16.4.1 The limits apply throughout the frequency range 0,15 to 30 MHz for measurements performed in a semi anechoic chamber or an outdoor test site.

56-2.16.4.2 Measurements shall be performed with average and either quasi-peak or peak detectors.

The limits are given in paragraph 56-2.5.6. If peak detectors are used a correction factor of 20 dB as defined in CISPR 12 (fifth edition 2001 and Amd1:2005) shall be applied.

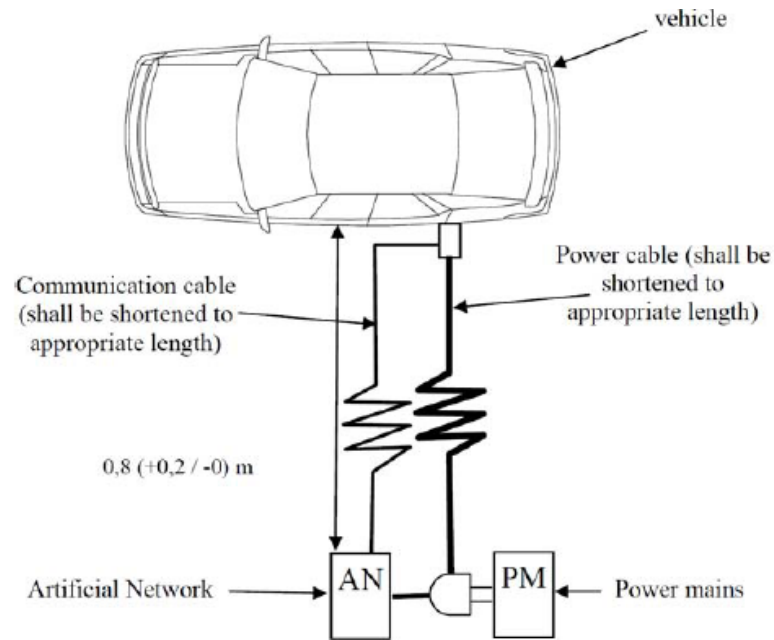


Figure 20: Vehicle in configuration "RESS charging mode coupled to the power grid"

56-2.17 Method of Testing for immunity of vehicles to electrical fast transient / burst disturbances conducted along AC and DC power lines

56-2.17.1 General

56-2.17.1.1 The test method described in this annex shall only be applied to vehicles. This method concerns only the configuration of the vehicle with "RESS in charging mode coupled to the power grid".

56-2.17.1.2 Test method

This test is intended to demonstrate the immunity of the vehicle electronic systems. The vehicle shall be subject to electrical fast transient/burst disturbances conducted along AC and DC power lines of the vehicle as described in this annex. The vehicle shall be monitored during the tests.

If not otherwise stated in this annex the test shall be performed according to IEC 61000- 4-4: 2nd edition 2004.

56-2.17.2 Vehicle state during tests in configuration "RESS in charging mode coupled to the power grid"

56-2.17.2.1 The vehicle shall be in an unladen condition except for necessary test equipment.

56-2.17.2.1.1 The vehicle shall be immobilized, engine OFF and in charging mode.

56-2.17.2.1.2 Basic vehicle conditions

It defines minimum test conditions (as far as applicable) and failures criteria for vehicle immunity tests. Other vehicle systems, which can affect immunity related functions, must be tested in a way to be agreed between manufacturer and Technical Service.

| "RESS in charging mode" vehicle test conditions | Failure criteria |
|---|------------------------|
| The RESS shall be in charging mode. The RESS state of charge shall be agreed in between the manufacturer and the Technical Service. | Vehicle sets in motion |

56-2.17.2.1.3 All other equipment which can be switched on permanently by the driver or passenger should be OFF.

56-2.17.2.2 Only non-perturbing equipment shall be used while monitoring the vehicle. The vehicle exterior and the passenger compartment shall be monitored to determine whether the requirements of this annex are met (e.g. by using (a) video camera(s), a microphone, etc.).

56-2.17.3 Test Equipments

56-2.17.3.1 The test equipments is composed of a reference ground plane (a shielded room is not required), a transient / burst generator, coupling / decoupling network (CDN) and capacitive coupling clamp.

56-2.17.3.2 The transient / burst generator shall meet the condition defined in paragraph 6.1 of IEC 61000-4-4: 2nd edition, 2004.

56-2.17.3.3 The coupling / decoupling network shall meet the condition defined in paragraph 6.2. of IEC 61000-4-4: 2nd edition, 2004.

When the coupling/decoupling network cannot be used on AC or DC power lines, the capacitive coupling clamp defined in paragraph 6.3. of IEC 61000-4-4: 2nd edition, 2004, can be used.

56-2.17.4 Test Setup

56-2.17.4.1 The vehicle test setup is based on the laboratory type setup as described in paragraph 7.2. of IEC 61000-4-4 : 2nd edition, 2004.

56-2.17.4.2 The vehicle shall be placed directly on the ground plane.

56-2.17.4.3 The Technical Service shall perform the test as specified in paragraph 56-2.5.7.2.1.

Alternatively, if the manufacturer provides measurement from a test laboratory accredited to the applicable parts of ISO 17025 (second edition 2005 and Corrigendum:2006) and recognized by the Approval Authority, the Technical Service may choose not to perform the test to confirm that the vehicle meets the requirements of this annex.

56-2.17.5 Generation of required Test Level

56-2.17.5.1 Test methodology

56-2.17.5.1.1 The test method according to IEC 61000-4-4: 2nd edition, 2004 shall be used to establish the test level requirements.

56-2.17.5.1.2 Test phase

The vehicle shall be positioned on the ground plane. The electrical fast transient / burst (EFT/B) shall be applied on the vehicle on the AC/DC power lines in common modes by using CDN as described in figure 21.

The test setup must be noted in the test report.

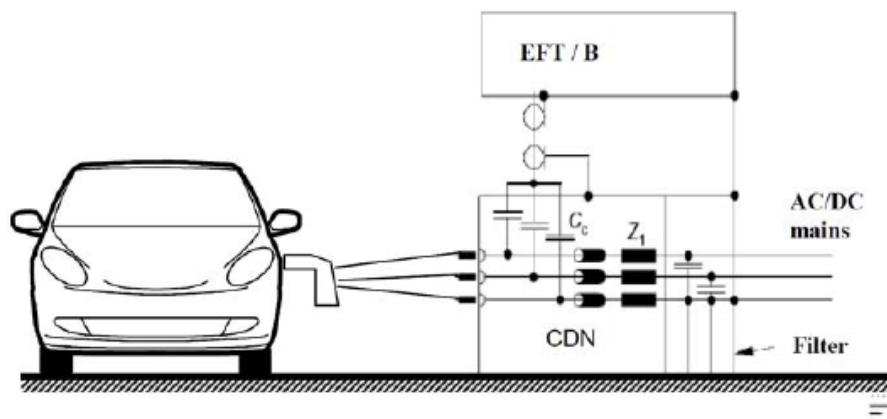


Figure 21: Vehicle in configuration "RESS charging mode" coupled to the power grid coupling on AC/DC power lines

56-2.18 Method(s) of testing for immunity of vehicles to surges conducted along AC and DC power lines

56-2.18.1 General

56-2.18.1.1 The test method described in this annex shall only be applied to vehicles. This method concerns only the configuration of the vehicle with "RESS in charging mode coupled to the power grid".

56-2.18.1.2 Test method

This test is intended to demonstrate the immunity of the vehicle electronic systems. The vehicle shall be subject to surges conducted along AC and DC power lines of the vehicle as described in this annex. The vehicle shall be monitored during the tests.

If not otherwise stated in this annex the test shall be performed according to IEC 61000-4-5: 2nd edition 2005.

56-2.18.2 Vehicle state during tests in configuration "RESS in charging mode coupled to the power grid"

56-2.18.2.1 The vehicle shall be in an unladen condition except for necessary test equipment.

56-2.18.2.1.1 The vehicle shall be immobilized, engine OFF and in charging mode.

56-2.18.2.1.2 Basic vehicle conditions

It defines minimum test conditions (as far as applicable) and failures criteria for vehicle immunity tests. Other vehicle systems,

which can affect immunity related functions, must be tested in a way to be agreed between manufacturer and Technical Service.

| "RESS in charging mode" vehicle test conditions | Failure criteria |
|---|------------------------|
| The RESS shall be in charging mode. The RESS state of charge shall be agreed in between the manufacturer and the Technical Service. | Vehicle sets in motion |

56-2.18.2.1.3 All other equipment which can be switched on permanently by the driver or passenger should be OFF.

56-2.18.2.2 Only non-perturbing equipment shall be used while monitoring the vehicle. The vehicle exterior and the passenger compartment shall be monitored to determine whether the requirements of this annex are met (e.g. by using (a) video camera(s), a microphone, etc.).

56-2.18.3 Test Equipments

56-2.18.3.1 The test equipments is composed of a reference ground plane (a shielded room is not required), a surge generator and a coupling / decoupling network (CDN).

56-2.18.3.2 The surge generator shall meet the condition defined in paragraph 6.1 of IEC 61000-4- 5: 2nd edition, 2005.

56-2.18.3.3 The coupling / decoupling network shall meet the condition defined in paragraph 6.3. of IEC 61000-4-5: 2nd edition, 2005.

56-2.18.4 Test Setup

56-2.18.4.1 The vehicle test setup is based on the setup described in paragraph 7.2. of IEC 61000-4-5: 2nd edition, 2005.

56-2.18.4.2 The vehicle shall be placed directly on the ground plane.

56-2.18.4.3 The Technical Service shall perform the test as specified in paragraph 56-2.7.8.2.1.

Alternatively, if the manufacturer provides measurement from a test laboratory accredited to the applicable parts of ISO 17025 (second edition 2005 and Corrigendum:2006) and recognized by the Approval Authority, the Technical Service may choose not to perform the test to confirm that the vehicle meets the requirements.

56-2.18.5 Generation of required Test Level

56-2.18.5.1 Test methodology

56-2.18.5.1.1 The test method according to IEC 61000-4-5: 2nd edition 2005 shall be used to establish the test level requirements.

56-2.18.5.1.2 Test phase

The vehicle shall be positioned on the ground plane. The electrical surge shall be applied on the vehicle on the AC/DC power lines between each line and earth and between lines by using CDN as described in Figure 22.

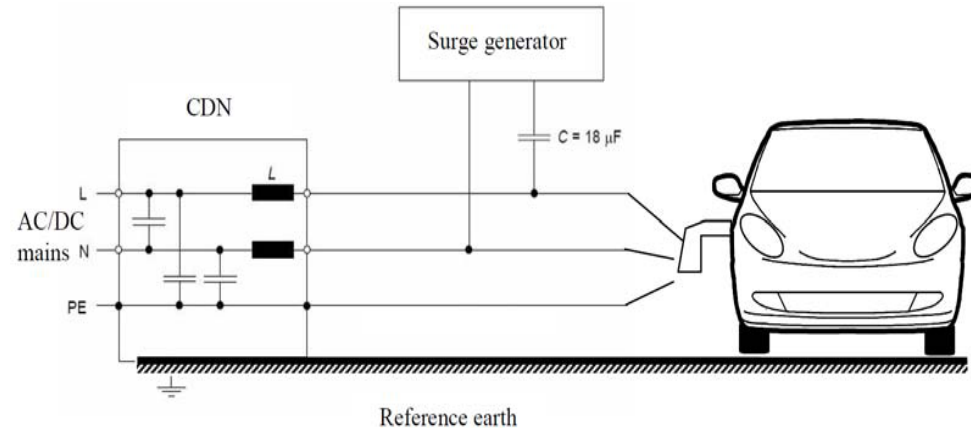


Figure 22: Vehicle in configuration "RESS charging mode coupled to the power grid" – Coupling between line and for DC or AC (single phase) power lines

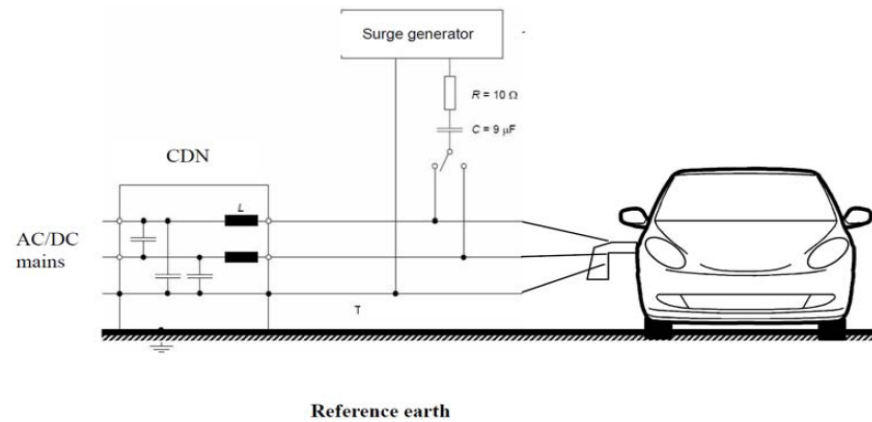


Figure 23: Vehicle in configuration "RESS charging mode coupled to the power grid" – Coupling between each line and earth for DC or AC (single phase) power lines

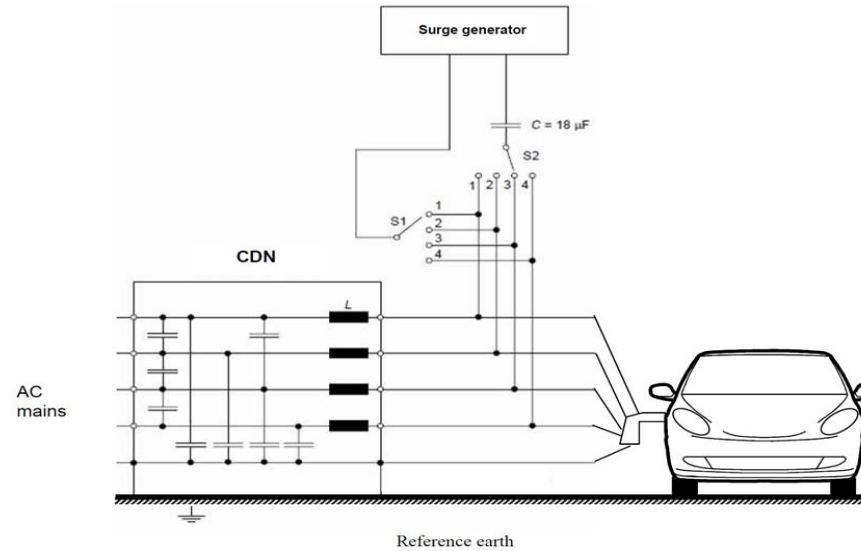


Figure 24: Vehicle in configuration "RESS charging mode coupled to the power grid" – Coupling between lines for AC (three phases) power lines

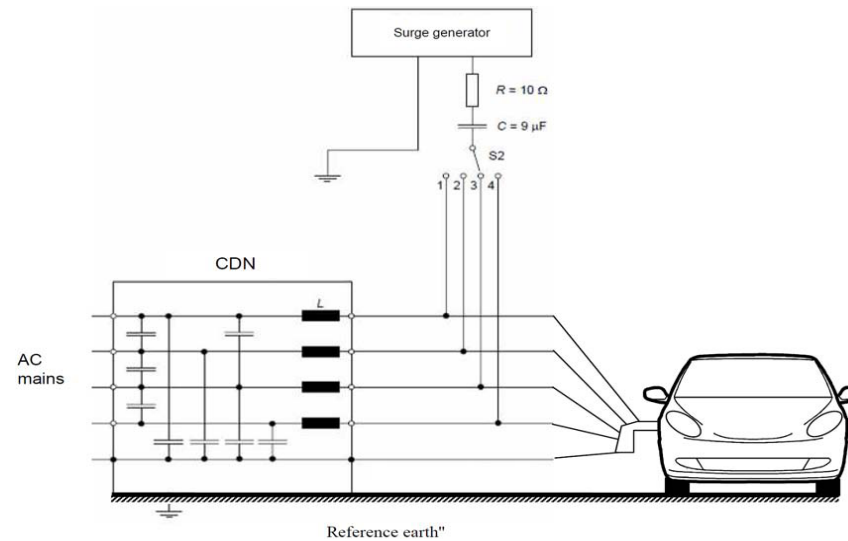


Figure 25: Vehicle in configuration "RESS charging mode coupled to the power grid" – Coupling between each line and earth for AC

(three phases) power lines